

Load Balancing Philips Healthcare Radiology Informatics System

Version 1.1



Table of Contents

1. About this Guide	5
1.1. Acronyms & Terminology Used in the Guide	5
2. Prerequisites	
3. Software Versions Supported	5
3.1. Loadbalancer.org Appliance	
3.2. Philips RIS	5
4. Load Balancing RIS	6
4.1. Virtual Services (VIP) Requirements	
4.2. SSL Termination	
5. Ports Used by the Appliance	
6. Deployment Concept	
7. Load Balancer Deployment Methods	8
7.1. Layer 7 SNAT Mode	
7.2. Layer 4 DR Mode	
8. Configuring RIS for Load Balancing	
8.1. Layer 7 SNAT Mode	10
8.2. Layer 4 DR Mode.	
8.2.1. Windows Server 2016 & 2019	10
8.2.1.1. Step 1 of 3: Install the Microsoft Loopback Adapter	10
8.2.1.2. Step 2 of 3: Configure the Loopback Adapter	
8.2.1.3. Step 3 of 3: Configure the strong/weak host behavior	13
8.2.1.4. Verify the Strong/Weak Host Configuration	
9. Load Balancer Appliance Installation & Configuration for RIS	
9.1. Overview	
9.2. Hardware Appliance Installation	
9.3. Configuring Initial Network Settings	
9.4. Accessing the Appliance WebUI	
9.4.1. Main Menu Options	
9.5. Appliance Software Update	
9.5.1. Determining the Current Software Version	
9.5.2. Checking for Updates using Online Update	
9.5.3. Using Offline Update	
9.6. Appliance Security Mode Configuration	
9.7. Appliance Network Configuration	
9.7.1. Verify Network Connections	
9.7.2. Configuring Hostname & DNS	
9.7.3. Configuring NTP	
9.8. Configuring Layer 4 Default Health Check Settings	
9.9. Configuring Load Balanced RIS Services	
9.9.1. VIP 1 - RIS	
9.9.1.1. Virtual Service (VIP) Configuration	
9.9.1.2. Define the Associated Real Servers (RIPs)	
9.9.1.3. Upload the SSL Certificate	
9.9.1.4. Configuring SSL Termination	
9.9.2. VIP 1-B1 - RIS_EM	
9.9.2.1. Virtual Service (VIP) Configuration	
9.9.2.2. Define the Associated Real Servers (RIPs)	
9.9.3. VIP 1-B2 - RIS_IM	31

9.9.3.1. Virtual Service (VIP) Configuration	31
9.9.3.2. Define the Associated Real Servers (RIPs)	32
9.9.4. VIP 1-B3 - RIS_RISServicesWS	33
9.9.4.1. Virtual Service (VIP) Configuration	33
9.9.4.2. Define the Associated Real Servers (RIPs)	34
9.9.5. VIP 1-B4 - RIS_Auth	
9.9.5.1. Virtual Service (VIP) Configuration	34
9.9.5.2. Define the Associated Real Servers (RIPs)	35
9.9.6. VIP 1-B5 - RIS_WS	36
9.9.6.1. Virtual Service (VIP) Configuration	36
9.9.6.2. Define the Associated Real Servers (RIPs)	
9.9.7. VIP 1-B6 - RIS_WEB	37
9.9.7.1. Virtual Service (VIP) Configuration	37
9.9.7.2. Define the Associated Real Servers (RIPs)	38
9.9.8. VIP 1-B7 - RIS_IWEB_sms	39
9.9.8.1. Virtual Service (VIP) Configuration	39
9.9.8.2. Define the Associated Real Servers (RIPs)	40
9.9.9. VIP 1-B8 - RIS_IWEB_gbad.	40
9.9.9.1. Virtual Service (VIP) Configuration	40
9.9.9.2. Define the Associated Real Servers (RIPs)	41
9.9.10. VIP 1-B9 - RIS_IWEBP_ws	
9.9.10.1. Virtual Service (VIP) Configuration	42
9.9.10.2. Define the Associated Real Servers (RIPs)	42
9.9.11. VIP 2 - Patient_Assistance.	43
9.9.11.1. Virtual Service (VIP) Configuration	43
9.9.11.2. Define the Associated Real Servers (RIPs)	45
9.9.11.3. Upload the SSL Certificate	45
9.9.11.4. Configuring SSL Termination	46
9.9.12. VIP 3 - R2I	47
9.9.12.1. Create the Custom Health Check	47
9.9.12.2. Virtual Service (VIP) Configuration	
9.9.12.3. Define the Associated Real Servers (RIPs)	
9.9.13. VIP 4 - EIS	
9.9.13.1. Virtual Service (VIP) Configuration	
9.9.13.2. Define the Associated Real Servers (RIPs)	
9.9.14. VIP 5 - External_SMS	
9.9.14.1. Virtual Service (VIP) Configuration	
9.9.14.2. Define the Associated Real Servers (RIPs)	
9.9.14.3. Upload the SSL Certificate	
9.9.14.4. Configuring SSL Termination	
9.9.15. Finalizing the Configuration	
10. Configuring RIS Components to use the Load Balancer	
11. Testing & Verification	
12. Configuring HA - Adding a Secondary Appliance	
12.1. Non-Replicated Settings	
12.2. Configuring the HA Clustered Pair	
13. Optional Appliance Configuration	
13.1. SNMP Configuration	
13.2. Configuring Email Alerts for Virtual Services	
13.2.1. Layer 4	
13.2.1.1. Global Layer 4 Email Settings	61

13.2.1.2. VIP Level Settings	61
13.2.2. Layer 7	
13.3. Configuring Email Alerts for Heartbeat	
13.4. Configuring a Smart Host (SMTP relay).	63
14. Technical Support	
15. Further Documentation	64
16. Appendix	65
16.1. Generating a CSR on the Load Balancer	65
17. Document Revision History	67

1. About this Guide

This guide details the steps required to configure a load balanced Philips Healthcare Radiology Informatics System (RIS) environment utilizing Loadbalancer.org appliances. It covers the configuration of the load balancers and also any RIS configuration changes that are required to enable load balancing.

1.1. Acronyms & Terminology Used in the Guide

Acronym	Description	
RIS	Radiology Informatics System	
R2I	Radiology to Interface	
EIS	Extensible Integration Software	
VIP	Virtual IP address - the IP address of the load balanced cluster of RIPs, the address presented to connecting clients. Also refers to the logical load balancer configuration and is used as an acronym for Virtual Service.	
RIP	The Real IP address - the IP address of a backend server in the cluster. Also refers to the logical load balancer configuration and is used as an acronym for Real Server.	
Virtual Service	The main building block used to define load balanced services. It defines the IP address clients connect to, which Real Servers are load balanced and other settings such as health check options, persistence options and timeout settings.	
Real Server	The actual backend server being load balanced. Multiple Real Servers are associated with a Virtual Service.	

2. Prerequisites

- 1. Ensure that firewalls and other network devices are configured to allow management and other required access to the appliance for details of all ports used refer to Ports Used by the Appliance.
- 2. Ensure that firewalls and other network devices are configured to allow client/test access to all Virtual Services (VIPs).
- 3. Ensure that firewalls and other network devices are configured to allow load balancer access to all RIS servers
- 4. Have IP addresses for the appliance and all required Virtual Services.

3. Software Versions Supported

3.1. Loadbalancer.org Appliance

V8.8.1 & later

3.2. Philips RIS

• V11.6.0.x

4. Load Balancing RIS

8 Note

It's highly recommended that you have a working RIS environment first before implementing the load balancer.

4.1. Virtual Services (VIP) Requirements

To provide load balancing and HA for RIS, the following VIPs are required:

Ref.	VIP Name	Mode/Type	Port(s)	Persistence	Health Check
VIP 1	RIS	L7 SNAT	80	None	No Checks, Always On
VIP 1-B1	RIS_EM	Backend Only	-	HTTP Cookie	HTTP (GET)
VIP 1-B2	RIS_IM	Backend Only	-	HTTP Cookie	HTTP (GET)
VIP 1-B3	RIS_RISServicesWS	Backend Only	-	HTTP Cookie	HTTP (GET)
VIP 1-B4	RIS_Auth	Backend Only	-	None	HTTP (GET)
VIP 1-B5	RIS_WS	Backend Only	-	None	HTTP (GET)
VIP 1-B6	RIS_WEB	Backend Only	-	None	HTTP (GET)
VIP 1-B7	RIS_IWEB_sms	Backend Only	-	HTTP Cookie	HTTP (GET)
VIP 1-B8	RIS_IWEB_gbad	Backend Only	-	HTTP Cookie	HTTP (GET)
VIP 1-B9	RIS_IWEBP_ws	Backend Only	-	HTTP Cookie	ICMP Ping
VIP 2	Patient_Assistance	L7 SNAT	80	None	HTTP (GET)
VIP 3	R2I	L4 DR	* (all ports)	None	External Script
VIP 4	EIS	L4 DR	* (all ports)	Source IP	HTTP (GET)
VIP 5	External_SMS	L7 SNAT	80	HTTP Cookie	Connect to port

8 Note

VIPs with names in the format **VIP 1-B<number>** are **Backend Only** VIPs. These are used to define a pool of Real Servers. ACL's are then used by the 'parent' VIP (VIP 1) to determine which **Backend Only** VIP should be selected based on the requested URL.

(!) Important

Ensure that the required DNS records are created that point to the appropriate VIP. If DNS records already exist, ensure that they are modified to point to the VIP rather than individual servers.

4.2. SSL Termination

SSL Termination is configured on the load balancer for the following VIPs:

• VIP 1 - **RIS**

- VIP 2 Patient_Assistance
- VIP 5 External_SMS

This provides a corresponding HTTPS Virtual Service for each VIP. Certificates in PEM or PFX format can be uploaded or if required a CSR can be generated on the load balancer to request a new certificate.

5. Ports Used by the Appliance


By default, the appliance uses the following TCP & UDP ports:

Protocol	Port	Purpose
TCP	22 *	SSH
TCP & UDP	53 *	DNS / GSLB
TCP & UDP	123	NTP
TCP & UDP	161 *	SNMP
UDP	6694	Heartbeat between Primary & Secondary appliances in HA mode
TCP	7778	HAProxy persistence table replication
TCP	9000 *	Gateway service (Centralized/Portal Management)
TCP	9080 *	WebUI - HTTP (disabled by default)
TCP	9081 *	Nginx fallback page
TCP	9443 *	WebUI - HTTPS
TCP	25565 *	Shuttle service (Centralized/Portal Management)

8 Note

The ports used for SSH, GSLB, SNMP, the WebUI, the fallback page, the gateway service and the shuttle service can be changed if required. For more information, please refer to Service Socket Addresses.

6. Deployment Concept

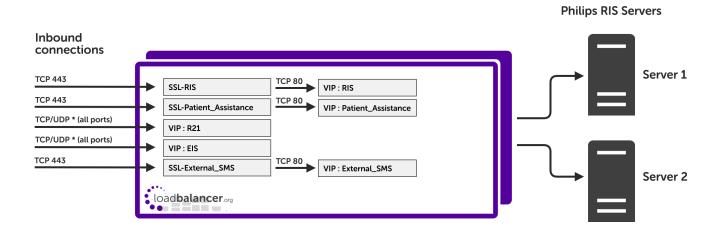


7. Load Balancer Deployment Methods

For RIS, both layer 4 DR mode and layer 7 SNAT mode are used. These modes are described below and are used for the configurations presented in this guide.

7.1. Layer 7 SNAT Mode

Layer 7 SNAT mode uses a proxy (HAProxy) at the application layer. Inbound requests are terminated on the load balancer and HAProxy generates a new corresponding request to the chosen Real Server. As a result, Layer 7 is typically not as fast as the Layer 4 methods. Layer 7 is typically chosen when either enhanced options such as SSL termination, cookie based persistence, URL rewriting, header insertion/deletion etc. are required, or when the network topology prohibits the use of the layer 4 methods.

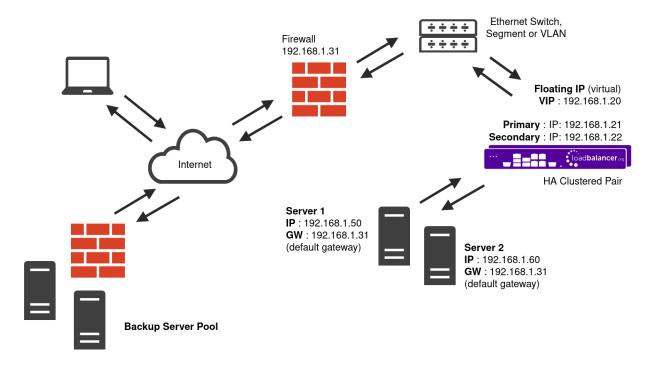

- Because layer 7 SNAT mode is a full proxy, any server in the cluster can be on any accessible subnet including across the Internet or WAN.
- Layer 7 SNAT mode is not transparent by default, i.e. the Real Servers will not see the source IP address of the client, they will see the load balancer's own IP address by default, or any other local appliance IP address if preferred (e.g. the VIP address). This can be configured per layer 7 VIP. If required, the load balancer can be configured to provide the actual client IP address to the Real Servers in 2 ways. Either by inserting a header that contains the client's source IP address, or by modifying the Source Address field of the IP packets and replacing the IP address of the load balancer with the IP address of the client. For more information on these methods please refer to Transparency at Layer 7.
- Layer 7 SNAT mode can be deployed using either a one-arm or two-arm configuration. For two-arm
 deployments, eth0 is normally used for the internal network and eth1 is used for the external network
 although this is not mandatory.
- Requires no mode-specific configuration changes to the load balanced Real Servers.


- Port translation is possible with Layer 7 SNAT mode, e.g. VIP:80 → RIP:8080 is supported.
- You should not use the same RIP:PORT combination for layer 7 SNAT mode VIPs and layer 4 SNAT mode VIPs because the required firewall rules conflict.

7.2. Layer 4 DR Mode

Layer 4 DR (Direct Routing) mode is a very high performance solution that requires little change to your existing infrastructure.

8 Note

Kemp, Brocade, Barracuda & A10 Networks call this *Direct Server Return* and F5 call it *nPath*.

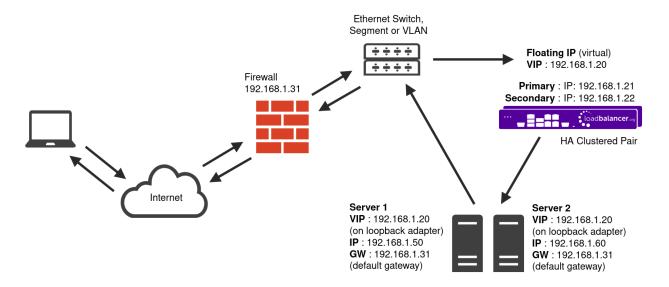

- DR mode works by changing the destination MAC address of the incoming packet to match the selected Real Server on the fly which is very fast.
- When the packet reaches the Real Server it expects the Real Server to own the Virtual Services IP address (VIP). This means that each Real Server (and the load balanced application) must respond to both the Real Server's own IP address and the VIP.
- The Real Server should not respond to ARP requests for the VIP. Only the load balancer should do this. Configuring the Real Server in this way is referred to as "Solving the ARP Problem". For more information please refer to DR Mode Considerations.
- On average, DR mode is 8 times quicker than NAT mode for HTTP and much faster for other applications such as Remote Desktop Services, streaming media and FTP.
- The load balancer must have an interface in the same subnet as the Real Servers to ensure layer 2 connectivity which is required for DR mode to operate.
- The VIP can be brought up on the same subnet as the Real Servers or on a different subnet provided that the load balancer has an interface in that subnet.
- Port translation is not possible with DR mode, e.g. VIP:80 → RIP:8080 is not supported.
- DR mode is transparent, i.e. the Real Server will see the source IP address of the client.

8. Configuring RIS for Load Balancing

8.1. Layer 7 SNAT Mode

Layer 7 SNAT mode VIPs do not require any mode specific configuration changes to the load balanced Real Servers (RIS Servers).

8.2. Layer 4 DR Mode

Layer 4 DR mode VIPs require the "ARP problem" to be solved on each load balanced Real Server (RIS Server). This enables DR mode to work correctly.

The "ARP problem" must be solved on each Real Server associated with the following VIPs:

- VIP 3 R2I
- VIP 4 EIS

Detailed steps on solving the "ARP problem" for Windows 2016 and 2019 are presented below.

(!) Important

If EIS v11.6 or later is installed on the same servers as R2I, it's not possible to add 2 Loopback adapters. Instead, configure 2 IP addresses on the same Loopback adapter - the first that corresponds to the R2I VIP address and the second that corresponds to the EIS VIP address.

8.2.1. Windows Server 2016 & 2019


Windows Server 2016 and 2019 support Direct Routing (DR) mode through the use of the Microsoft Loopback Adapter that must be installed and configured on each load balanced (Real) Server. The IP address configured on the Loopback Adapter must be the same as the Virtual Service (VIP) address. This enables the server to receive packets that have their destination set as the VIP address. If a Real Server is included in multiple DR mode VIPs, an IP address for each VIP must be added to the Loopback Adapter.

In addition, steps must be taken to set the strong/weak host behavior on each Real Server. This is used to either prevent or allow interfaces to receive packets destined for a different interface on the same server.

(1) Important The following 3 steps must be completed on all RIS R2I and EIS servers.

8.2.1.1. Step 1 of 3: Install the Microsoft Loopback Adapter


- 1. Click Start, then run hdwwiz to start the Hardware Installation Wizard.
- 2. Once the Wizard has started, click Next.
- 3. Select Install the hardware that I manually select from a list (Advanced), click Next.
- 4. Select Network adapters, click Next.

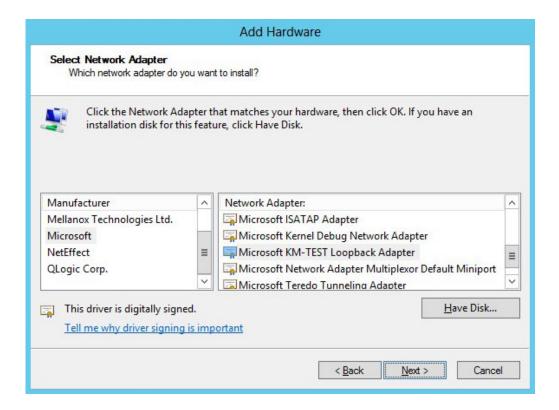


- 5. Select Microsoft & Microsoft KM-Test Loopback Adapter, click Next.
- 6. Click **Next** to start the installation, when complete click **Finish**.

8.2.1.2. Step 2 of 3: Configure the Loopback Adapter

- 1. Open Control Panel and click **Network and Sharing Center**.
- 2. Click Change adapter settings.
- 3. Right-click the new Loopback Adapter and select Properties.
- 4. Uncheck all items except Internet Protocol Version 4 (TCP/IPv4) as shown below:

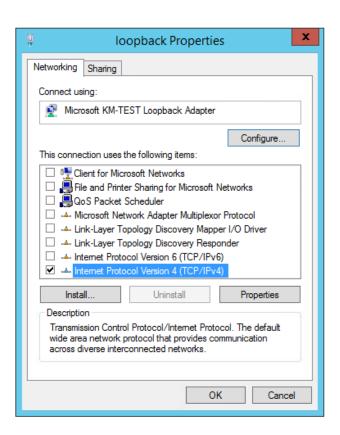

5. Ensure that Internet Protocol Version (TCP/IPv4) is selected, click Properties and configure the IP address to be the same as the Virtual Service address (VIP) with a subnet mask of 255.255.255.255, e.g. 192.168.2.20/255.255.255.255 as shown below:

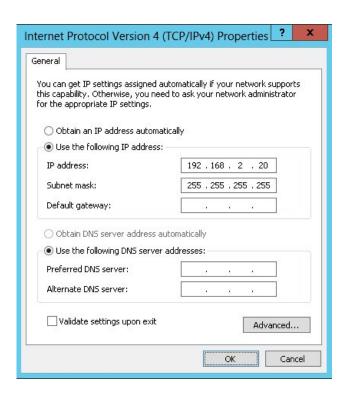

- Note 192.168.2.20 is an example, make sure you specify the correct VIP address.
- Note If a Real Server is included in multiple DR mode VIPs, an IP address for each VIP must be

added to the Loopback Adapter.

6. Click **OK** then click **Close** to save and apply the new settings.

8.2.1.3. Step 3 of 3: Configure the strong/weak host behavior

The strong/weak host behavior can be configured using either of the following 2 methods:

- Option 1 Using network shell (netsh) commands
- Option 2 Using PowerShell cmdlets

The commands in this section assume that the LAN Adapter is named "**net**" and the Loopback Adapter is named "**loopback**" as shown in the example below:



(1) Important

Either adjust the commands to use the names allocated to your LAN and loopback adapters, or rename the adapters before running the commands. Names are case sensitive so make sure that the interface names used in the commands match the adapter names exactly.

Option 1 - Using Network Shell (netsh) Commands

To configure the correct strong/weak host behavior run the following commands:

```
netsh interface ipv4 set interface "net" weakhostreceive=enabled
netsh interface ipv4 set interface "loopback" weakhostreceive=enabled
netsh interface ipv4 set interface "loopback" weakhostsend=enabled
```

Option 2 - Using PowerShell Cmdlets

 ${\tt Set-NetIpInterface - Interface Alias \ loopback - Weak HostReceive \ enabled - Weak HostSend \ enabled - DadTransmits \ 0 \ - Address Family \ IPv4}$

Set-NetIpInterface -InterfaceAlias net -WeakHostReceive enabled -AddressFamily IPv4

Repeat steps 1 to 3 for all RIS R2I and EIS servers.


8.2.1.4. Verify the Strong/Weak Host Configuration

The following PowerShell Cmdlets can be used to verify the settings:



The "net" interface:

netsh interface ipv4 show interface net

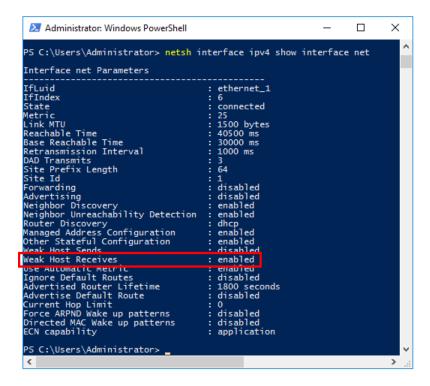

The "loopback" interface:

netsh interface ipv4 show interface loopback

```
Administrator: Windows PowerShell

PS C:\Users\Administrator> netsh interface ipv4 show interface loopback

Interface loopback Parameters

IfLuid : ethernet_3

IfIndex : 3

State : connected

Metric : 25

Link MTU : 1500 bytes

Reachable Time : 30000 ms

Reseachable Time : 30000 ms

Retransmission Interval : 1000 ms

DAD Transmits : 3

Site Prefix Length : 64

Site Id : 1

Forwarding : disabled

Advertising : disabled

Advertising : disabled

Neighbor Discovery : enabled

Neighbor Unreachability Detection : enabled

Nouter Discovery : dhcp

Managed Address Configuration : enabled

Weak Host Sends : enabled

Weak Host Sends : enabled

Weak Host Sends : enabled

Weak Host Receives : enabled

Weak Host Receives : enabled

Use Automatic Metric : enabled

Use Automatic Metric : enabled

Use Automatic Metric : enabled

Use Automatic Default Route : disabled

Advertised Router Lifetime : 1800 seconds

Advertised Router Lifetime : disabled

Current Hop Limit : 0

Force ARPND Wake up patterns : disabled

Directed MAC Wake up patterns : disabled

ECN capability : application

PS C:\Users\Administrator> _
```

9. Load Balancer Appliance Installation & Configuration for RIS

9.1. Overview

For RIS deployments, 2 load balancer appliances must be installed and configured and then paired to create an active/passive HA clustered pair.


The following is an overview of the installation and configuration process:

- 1. Deploy 2 hardware appliances refer to Section 9.2
- 2. Configure the management IP address and other basic settings on **both** appliances refer to Section 9.3
- 3. Run a software update check on **both** appliances refer to Section 9.5
- 4. Configure the appliance security mode on **both** appliances refer to Section 9.6
- 5. Verify network connections and configure any additional settings on **both** appliances refer to Section 9.7
- 6. Configure the required load balanced services on the **Primary** appliance refer to Section 9.9
- 7. Restart services on the **Primary** appliance refer to Section 9.9.15
- 8. Verify that everything is working as expected on the **Primary** appliance refer to Section 11
- Configure the HA Pair on the **Primary** appliance this will replicate all load balanced services to the Secondary appliance, once configured the Secondary appliance will be kept in-sync automatically - refer to Section 12
- 10. Configure any required optional settings on both appliances refer to Section 13

9.2. Hardware Appliance Installation

Follow the steps below to install 2 appliances, one as the Primary the other as the Secondary.

- 1. Remove all packaging and rack mount the appliance if required.
- 2. Connect the power lead.
 - Note The power supply is an auto-sensing unit (100v to 240v).
- 3. Connect network cables from all 4 interfaces (eth0 to eth3) to the relevant switch. All interfaces are configured as a single bond in the following section (Section 9.3).
- 4. Attach a monitor & keyboard to the appliance.

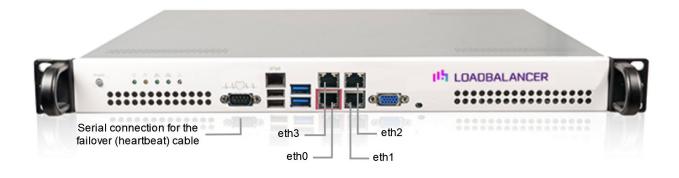

8 Note

The above image shows the Enterprise Prime. For network interface information for other models please refer to Front & Rear Panel Layouts.

Once both appliances are installed, connect a serial (heartbeat) cable between them.

Check that mains power is on and power up both appliances. The fans should start & the front panel LEDs should light.

9.3. Configuring Initial Network Settings

After power up, the following startup message is displayed on the appliance console:

```
Welcome to the Loadbalancer.org appliance.

To perform initial network configuration, log in to the console as Username: setup Password: setup

To access the web interface and wizard, point your browser at http://192.168.2.21:9080/
or https://192.168.2.21:9443/
```

As mentioned in the text, to perform initial network configuration, login as the "setup" user at the appliance console.

Once logged in, the Network Setup Wizard will start automatically. This will enable you to configure the management IP address and other network settings for the appliance.


login to the console:

Username: setup **Password:** setup

A series of screens will be displayed that allow network settings to be configured:

In the Configure Management IP screen, leave Yes selected and hit <ENTER> to continue.





In the **Peer Recovery** screen, leave **No** selected and hit <ENTER> to continue.



f Note

For more details on node recovery using this option please refer to Disaster Recovery After Node (Primary or Secondary) Failure.


In the **Centralized Management** screen, if you have been provided with Management Server details select **Yes**, otherwise leave **No** selected, then hit <ENTER> to continue.




8 Note

For information on how to modify Centralized Management settings via the WebUI, please refer to Portal Management & Appliance Adoption.


In the Available Interfaces screen, a list of available interfaces will be displayed, hit <ENTER> to continue.

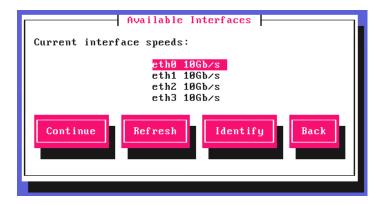


In the **Configure Bonding** screen, select **Yes** and hit <ENTER> to continue.




The **Select Interfaces** screen will be displayed. Using the space bar, select all 4 interfaces for the bond, select **Create** and hit <ENTER> to continue.



In the **Set Bond Mode** screen, select **Mode 4 - LACP 802.3ad**, select the **Select** button and hit <ENTER> to continue.



In the Configure a VLAN screen, leave No selected, then hit <ENTER> to continue.



In the **Set IP address** screen, enter the required *Static IP Address* & *CIDR Prefix* and select **Done** and hit <ENTER> to continue.



8 Note

A subnet mask such as 255.255.255.0 is not valid, in this case enter 24 instead.

In the **Configure Default Gateway** screen, enter the required **Default Gateway IP Address**, select **Done** and hit <ENTER> to continue.



In the **Configure DNS Servers** screen, configure the required DNS server(s), select **Done** and hit <ENTER> to continue.




In the **Set Password** screen, hit <ENTER> to continue.




Enter the *Password* you'd like to use for the **loadbalancer** WebUI user account and the **root** Linux user account. Repeat the password, select **Done** and hit <ENTER> to continue.




If you selected **Yes** when asked if you want to enroll for Centralized Management, you'll now be prompted for the details. Default values for the *Host* and *Port* are set and can be changed if required. Enter the *Username* and *Password* for the management server account you'd like the appliance to be associated with, select **Done** and hit <ENTER> to continue.



In the **Summary** screen, check all settings. If everything is correct, leave **Configure** selected and hit <ENTER> to continue. All settings will be applied. If you need to change a setting, use the **Back** button.

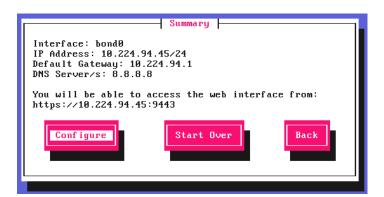

Once the configuration has been written, the **Configuration Complete** screen and message will be displayed. Click **OK** to exit the wizard and return to the command prompt.



9.4. Accessing the Appliance WebUI

The WebUI is accessed using a web browser. By default, users are authenticated using Apache authentication. Users can also be authenticated against LDAP, LDAPS, Active Directory or Radius - for more information, please refer to External Authentication.

1. Using a browser, navigate to the following URL:

https://<IP-address-configured-during-the-network-setup-wizard>:9443/lbadmin/

refer to Service Socket Addresses.

You'll receive a warning about the WebUl's SSL certificate. This is due to the default self signed certificate that is used. If preferred, you can upload your own certificate - for more information, please refer to Appliance Security Features.

If you need to change the port, IP address or protocol that the WebUl listens on, please

2. Log in to the WebUI using the following credentials:

Username: loadbalancer


Password: <configured-during-network-setup-wizard>

Note To change the password, use the WebUI menu option: *Maintenance > Passwords*.

Once logged in, the WebUI will be displayed as shown below:

LOADBALANCER



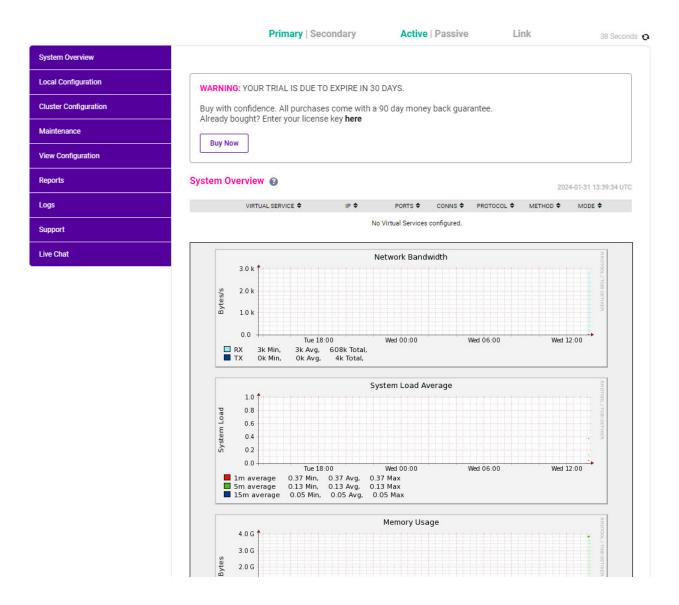

9.4.1. Main Menu Options

System Overview - Displays a graphical summary of all VIPs, RIPs and key appliance statistics

Local Configuration - Configure local host settings such as IP address, DNS, system time etc.

Cluster Configuration - Configure load balanced services such as VIPs & RIPs

Maintenance - Perform maintenance tasks such as service restarts and taking backups

View Configuration - Display the saved appliance configuration settings

Reports - View various appliance reports & graphs

Logs - View various appliance logs

Support - Create a support download, contact the support team & access useful links

Live Chat - Start a live chat session with one of our Support Engineers

9.5. Appliance Software Update

To ensure that the appliance(s) are running the latest software version, we recommend a software update check is performed.

9.5.1. Determining the Current Software Version

The software version is displayed at the bottom of the WebUI as shown in the example below:

Copyright © Loadbalancer.org Inc. 2002 – 2024 ENTERPRISE VA Max - v8.11.1



9.5.2. Checking for Updates using Online Update

8 Note

By default, the appliance periodically contacts the Loadbalancer.org update server and checks for updates. An update check can also be manually triggered as detailed below.

- 1. Using the WebUI, navigate to: Maintenance > Software Update.
- 2. Select Online Update.
- 3. If the latest version is already installed, a message similar to the following will be displayed:

Information: Version v8.11.1 is the current release. No updates are available

- 4. If an update is available, you'll be presented with a list of new features, improvements, bug fixes and security related updates.
- 5. Click **Online Update** to start the update process.

Note Do not navigate away whilst the update is ongoing, this may cause the update to fail.

6. Once complete (the update can take several minutes depending on download speed and upgrade version) the following message will be displayed:

Information: Update completed successfully.

7. If services need to be reloaded/restarted or the appliance needs a full restart, you'll be prompted accordingly.

9.5.3. Using Offline Update

If the load balancer does not have access to the Internet, offline update can be used.

8 Note

Please contact support@loadbalancer.org to check if an update is available and obtain the latest offline update files.

To perform an offline update:




- 1. Using the WebUl, navigate to: Maintenance > Software Update.
- 2. Select Offline Update.
- 3. The following screen will be displayed:

Software Update

Offline Update

The following steps will lead you through offline update.

- 1. Contact Loadbalancer.org support to obtain the offline update archive and checksum.
- 2. Save the archive and checksum to your local machine.
- 3. Select the archive and checksum files in the upload form below.
- 4. Click Upload and Install to begin the update process.



- 4. Select the Archive and Checksum files.
- 5. Click Upload and Install.
- 6. If services need to be reloaded/restarted or the appliance needs a full restart, you'll be prompted accordingly.

9.6. Appliance Security Mode Configuration

To enable shell commands to be run from the WebUI, the appliance Security Mode must be configured:

- 1. Using the WebUI, navigate to: Local Configuration > Security.
- 2. Set Appliance Security Mode to Custom.
- 3. Click Update.

9.7. Appliance Network Configuration

The standard RIS network configuration uses all 4 network adapters configured as an LACP 802.3ad bonded interface.

9.7.1. Verify Network Connections

- 1. Verify that all 4 network adapters are connected to the appropriate switch.
- 2. Using the WebUI, navigate to: Local Configuration > Network Interface Configuration.



3. Verify that the network is configured as required.

The IP address/CIDR prefix for **bond0** was set during the Network Setup Wizard and will be shown here, e.g. **10.224.94.45/24**.

9.7.2. Configuring Hostname & DNS

- 1. Using the WebUI, navigate to: Local Configuration > Hostname & DNS.
- 2. Set the required *Hostname* and *Domain Name*.
- 3. Configure additional DNS servers if required.
- 4. Click Update.

9.7.3. Configuring NTP

- 1. Using the WebUI, navigate to: Local Configuration > System Date & Time.
- 2. Select the required *System Timezone*.
- 3. Navigate to the first field in the NTP Servers section, specify the IP address of the RIS Database server.
- 4. Click Set Timezone & NTP.

9.8. Configuring Layer 4 Default Health Check Settings

- 1. Using the WebUI, navigate to: Cluster Configuration > Layer 4 Advanced Configuration.
- 2. Set the Check Interval to 10 (seconds).
- 3. Set the Check Timeout to 30 (seconds).
- 4. Set the Failure Count to 3 (seconds).
- 5. Click Update.

9.9. Configuring Load Balanced RIS Services


8 Note

All Virtual Services are listed in the table in Virtual Services (VIP) Requirements.

9.9.1. VIP 1 - RIS

9.9.1.1. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Enter the following details:

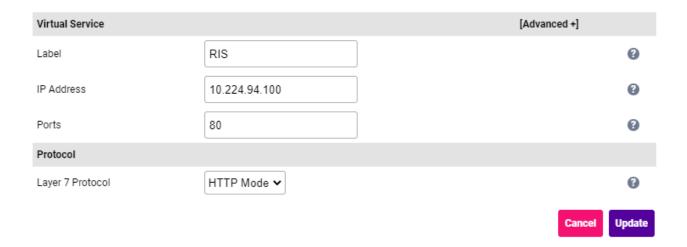

- Specify an appropriate Label for the Virtual Service, e.g. RIS.
- Set the Virtual Service IP Address field to the required IP address, e.g. 10.224.94.100.
- Set the Ports field to 80.
- Set the *Layer 7 Protocol* to **HTTP Mode**.
- 3. Click **Update** to create the Virtual Service.
- 4. Now click **Modify** next to the newly created VIP.
- 5. Scroll to the *Persistence* section.
 - Ensure that the *Persistence Mode* is set to **None**.
- 6. Scroll to the Health Checks section.
 - Set the Check Type to No checks, Always On.
- 7. Scroll to the ACL Rules section, and click the Add Rule button.
- 8. Set the **Type** to *Freetype* and copy and paste the following ACL rules into the *Freetype* field ensuring that the "#" is removed.



When text is copied from a pdf document that extends beyond 1 line, additional unwanted line feed formatting characters are included. Before pasting the text into the *Freetype* field, first copy the text to an editor such as Windows Notepad, then edit the text so that each ACL rule is on a single line (ACL rules start with "http-request" or "use_backend"), making


sure there's a space between text that was on different lines. Once complete, copy and paste this text into the *Freetype* field. If this is not done, syntax checking will fail when the HAProxy service is re-started.

```
http-request deny if { path_reg -i ^\/.*\/authenticationserver\/oauth\/patientkioskauth.* }
http-request deny if { path_reg -i ^\/PatientPortal\/patientkiosk.* }
http-request deny if { path_reg -i ^\/.*\/riswebserver\/api\/patientkiosk.* }
use_backend RIS_Auth if { path -m reg -i ^/[^/]*/authenticationserver/(oauth|api)/.+ } !{ path -m reg -i ^/[^/]+/authenticationserver/(oauth/token|api/changepassword) }
use_backend RIS_WS if { path_sub -i /WS/ }
use_backend RIS_RISServicesWS if { path_sub -i /RIS_RISServicesWS/ }
use_backend RIS_IM if { path_sub -i /InstantMessageWS/ }
use_backend RIS_EM if { path_sub -i /EnterpriseManagerWS/ }
use_backend RIS_Auth if { path_sub -i /AuthenticationServer/ }
use_backend RIS_WEB if { path_sub -i /RISWebServer/ }
use_backend RIS_WEB if { path -m reg -i ^/patientportal.? } || { path -m reg -i ^/web/(globals.bundle.js|index.html) } || { path -m reg -i ^/web/\d+/[^.]+\.[^.]*\.?\w+ } || { path -m reg -i ^/web/app/light\?shs=.+ }
use_backend RIS_WS if { path -m reg -i ^/[^/]+/riswebserver/api/.+ }
```

- 9. Click **OK** to save and close the ACL.
- 10. Leave all other settings at their default value.
- 11. Click **Update**.

9.9.1.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

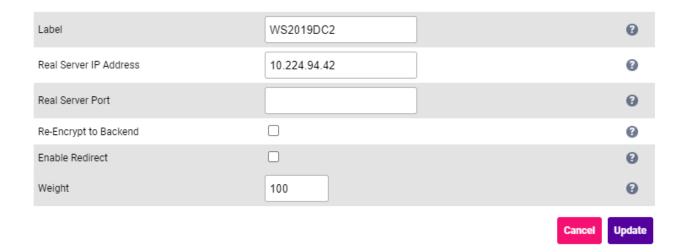

- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the Real Server IP Address field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.




- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.1.3. Upload the SSL Certificate

8 Note

If the production certificate is not currently available, continue to the next section (configuring SSL Termination) and leave *SSL Certificate* set to **Default Self Signed Certificate**. Once you have the production certificate, follow the steps in this section to upload the certificate and then navigate to *Cluster Configuration > SSL Termination*, click **Modify** next to the SSL termination, change *SSL Certificate* to the new certificate and click **Update**.

- 1. Using the WebUl, navigate to Cluster Configuration > SSL Certificate and click Add a new SSL Certificate.
- 2. Select the option **Upload prepared PEM/PFX file**.
- 3. Enter the following details:

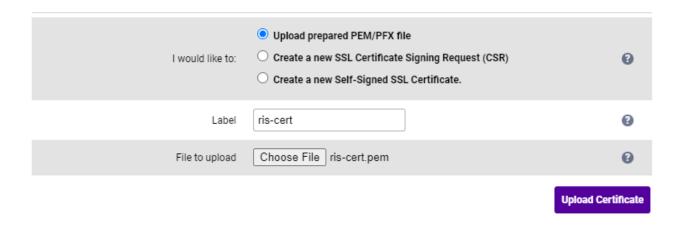


- Specify an appropriate *Label*, e.g. **ris-cert**.
- Click Choose File.
- Browse to and select the relevant PEM or PFX file.
- For PFX files specify the password if required.
- 4. Click Upload Certificate.

8 Note

If you don't have a certificate and want to create a Certificate Signing Request (CSR) on the load balancer, please refer to Generating a CSR on the Load Balancer.

9.9.1.4. Configuring SSL Termination

- 1. Using the WebUI, navigate to Cluster Configuration > SSL Termination and click Add a new Virtual Service.
- 2. Enter the following details:

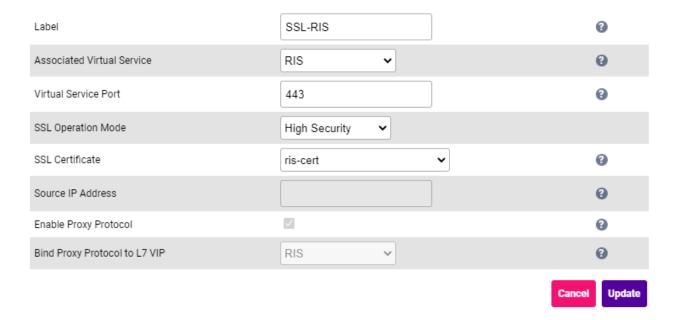

• Using the Associated Virtual Service drop-down, select the Virtual Service created above, e.g. RIS.


Once the VIP is selected, the *Label* field will be auto-populated with **SSL-RIS**. This can be changed if preferred.

- Ensure that the Virtual Service Port is set to 443.
- Leave SSL Operation Mode set to High Security.
- Select the required *SSL Certificate*.
- 3. Leave all other settings at their default value.
- 4. Click Update.

9.9.2. VIP 1-B1 - RIS_EM

9.9.2.1. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Click [Advanced].
- 3. Enter the following details:

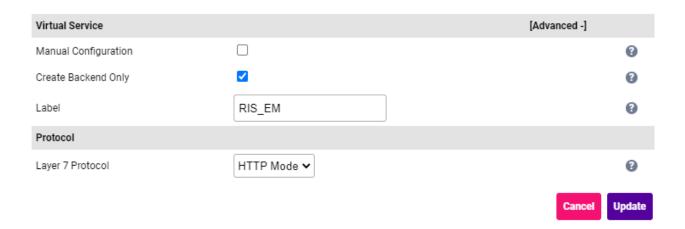


- Select (Check) Create Backend Only.
- Specify an appropriate Label for the Virtual Service, e.g. RIS_EM.
- Leave the Layer 7 Protocol set to HTTP Mode.
- 4. Click **Update** to create the Virtual Service.
- 5. Now click **Modify** next to the newly created VIP.
- 6. Scroll to the Persistence section.
 - Ensure that the Persistence Mode is set to HTTP Cookie.
 - Set the HTTP Cookie Name to RIS_EM.
- 7. Scroll to the Health Checks section.
 - Set the Check Type to Negotiate HTTP (GET).
 - Set the Request to Send to /CSHRIS-SGH11_6R20/EnterpriseManagerWS/api/HealthCheck/HealthCheck.



- Set *Response Expected* to **Equals** and set the value to **true**.
- 8. Leave all other settings at their default value.
- 9. Click Update.

9.9.2.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer* 7 *Real Servers* and click **Add a new Real Server** next to the newly created VIP.
- 2. Enter the following details:

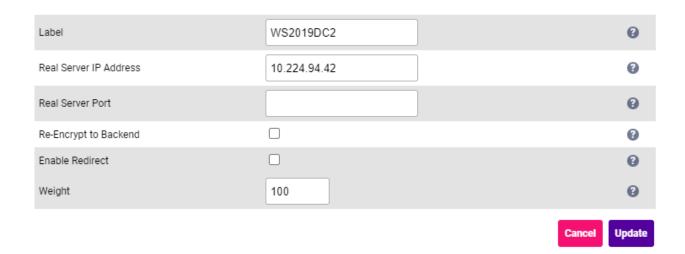


- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the Real Server IP Address field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.3. VIP 1-B2 - RIS IM

9.9.3.1. Virtual Service (VIP) Configuration


- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Click [Advanced].
- 3. Enter the following details:

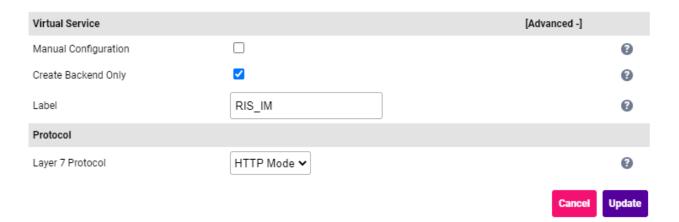

- Select (Check) Create Backend Only.
- Specify an appropriate *Label* for the Virtual Service, e.g. **RIS_IM**.
- Leave the Layer 7 Protocol set to HTTP Mode.




- 4. Click **Update** to create the Virtual Service.
- 5. Now click **Modify** next to the newly created VIP.
- 6. Scroll to the **Persistence** section.
 - Ensure that the *Persistence Mode* is set to **HTTP Cookie**.
 - Set the HTTP Cookie Name to RIS_IM.
- 7. Scroll to the Health Checks section.
 - Set the Check Type to Negotiate HTTP (GET).
 - Set the Request to Send to /CSHRIS-SGH11_6R20/InstantMessageWS/api/HealthCheck/HealthCheck.



- Set Response Expected to Equals and set the value to true.
- 8. Leave all other settings at their default value.
- 9. Click **Update**.

9.9.3.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

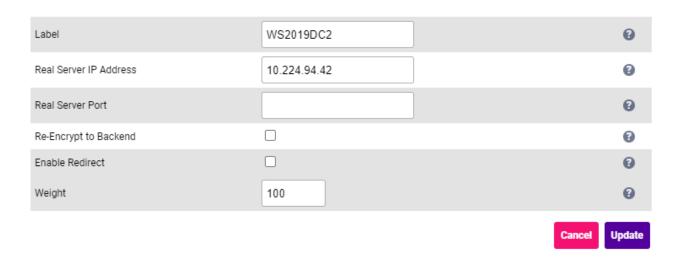

- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the *Real Server IP Address* field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click Update.




5. Repeat these steps to add additional Real Server(s).

9.9.4. VIP 1-B3 - RIS_RISServicesWS

9.9.4.1. Virtual Service (VIP) Configuration

- Using the WebUI, navigate to Cluster Configuration > Layer 7 Virtual Services and click Add a new Virtual Service.
- 2. Click [Advanced].
- 3. Enter the following details:

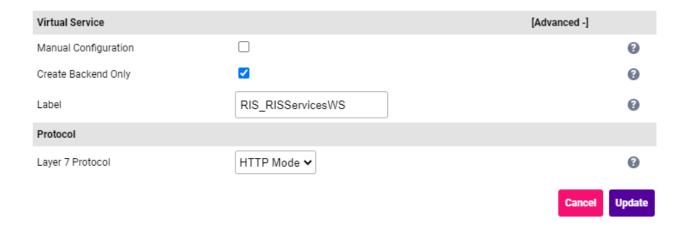


- Select (Check) Create Backend Only.
- Specify an appropriate Label for the Virtual Service, e.g. RIS_RISServicesWS.
- Leave the Layer 7 Protocol set to HTTP Mode.
- 4. Click **Update** to create the Virtual Service.
- 5. Now click **Modify** next to the newly created VIP.
- 6. Scroll to the *Persistence* section.
 - Ensure that the *Persistence Mode* is set to **HTTP Cookie**.
 - Set the HTTP Cookie Name to RIS_RISServicesWS.
- 7. Scroll to the *Health Checks* section.
 - Set the *Check Type* to **Negotiate HTTP (GET)**.
 - Set the Request to Send to /CSHRIS-SGH11_6R20/RISServicesWS/api/HealthCheck/HealthCheck.



- Set *Response Expected* to **Equals** and set the value to **true**.
- 8. Leave all other settings at their default value.
- 9. Click Update.

9.9.4.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

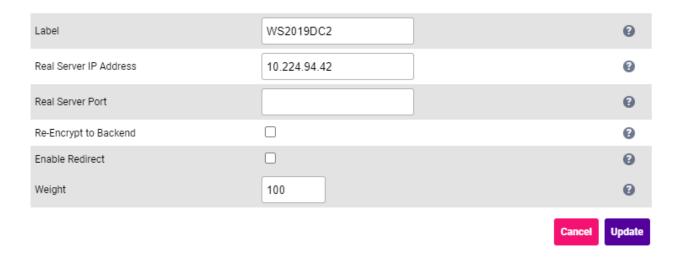


- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the Real Server IP Address field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).


9.9.5. VIP 1-B4 - RIS_Auth

9.9.5.1. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Click [Advanced].
- 3. Enter the following details:

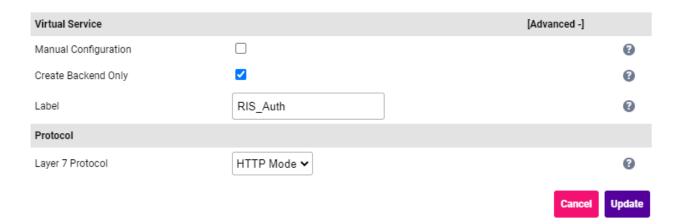


- Select (Check) Create Backend Only.
- Specify an appropriate *Label* for the Virtual Service, e.g. **RIS_Auth**.
- Leave the Layer 7 Protocol set to HTTP Mode.
- 4. Click **Update** to create the Virtual Service.
- 5. Now click **Modify** next to the newly created VIP.
- 6. Scroll to the Persistence section.
 - Set the Persistence Mode to None.
- 7. Scroll to the *Health Checks* section.
 - Set the Check Type to Negotiate HTTP (GET).
 - Set the Request to Send to /CSHRIS-SGH11_6R20/AuthenticationServer/api/HealthCheck.



- Set Response Expected to Equals and set the value to true.
- 8. Leave all other settings at their default value.
- 9. Click Update.

9.9.5.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

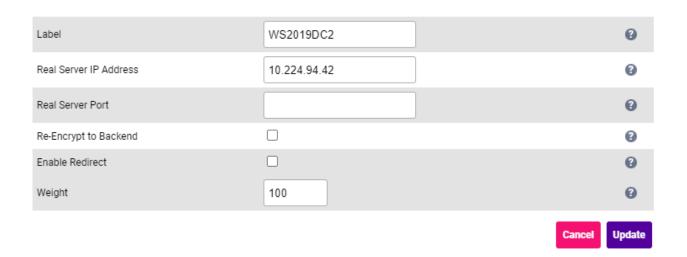

- Specify an appropriate Label for the RIP, e.g. WS2019DC2.
- Set the *Real Server IP Address* field to the required IP address, e.g. **10.224.94.42**.
- Leave the Real Server Port field blank.




- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.6. VIP 1-B5 - RIS_WS

9.9.6.1. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Click [Advanced].
- 3. Enter the following details:

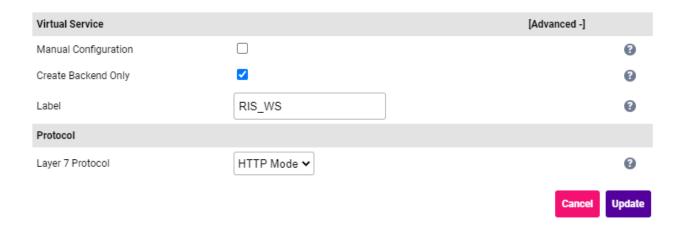

- Select (Check) Create Backend Only.
- Specify an appropriate Label for the Virtual Service, e.g. RIS_WS.
- Leave the Layer 7 Protocol set to HTTP Mode.
- 4. Click **Update** to create the Virtual Service.
- 5. Now click **Modify** next to the newly created VIP.
- 6. Scroll to the *Persistence* section.
 - Set the Persistence Mode to None.
- 7. Scroll to the *Health Checks* section.
 - Set the Check Type to Negotiate HTTP (GET).
 - Set the Request to Send to /CSHRIS-SGH11_6R20/WS/Service.asmx/HealthCheck.

Note CSHRIS-SGH11_6R20 is the current RIS core application folder name on the RIS servers.


- Set Response Expected to Equals and set the value to true.
- 8. Leave all other settings at their default value.



9. Click Update.

9.9.6.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

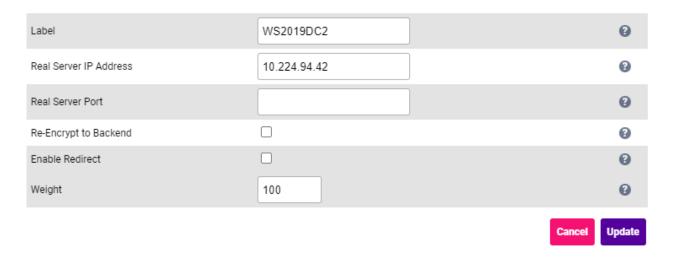


- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the Real Server IP Address field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).


9.9.7. VIP 1-B6 - RIS_WEB

9.9.7.1. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Click [Advanced].
- 3. Enter the following details:

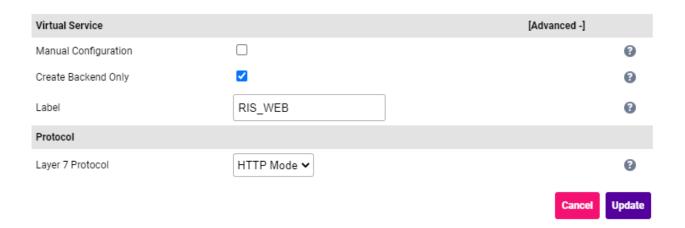


- Select (Check) Create Backend Only.
- Specify an appropriate Label for the Virtual Service, e.g. RIS_WEB.
- Leave the Layer 7 Protocol set to HTTP Mode.
- 4. Click **Update** to create the Virtual Service.
- 5. Now click **Modify** next to the newly created VIP.
- 6. Scroll to the *Persistence* section.
 - Set the *Persistence Mode* to **None**.
- 7. Scroll to the *Health Checks* section.
 - Set the Check Type to Negotiate HTTP (GET).
 - Set the Request to Send to /cshris-sgh11_6R20/RISWebServer/api/HealthCheck/HealthCheck.



- Set *Response Expected* to **Equals** and set the value to **true**.
- 8. Leave all other settings at their default value.
- 9. Click Update.

9.9.7.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

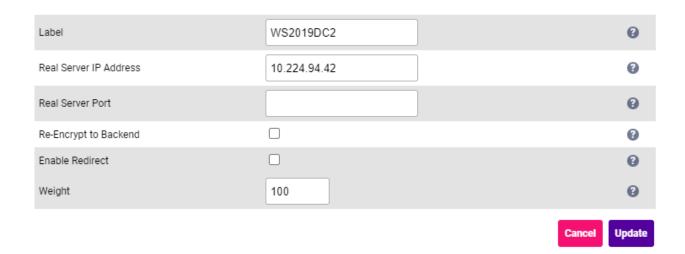


- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the Real Server IP Address field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.8. VIP 1-B7 - RIS_IWEB_sms

9.9.8.1. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Click [Advanced].
- 3. Enter the following details:

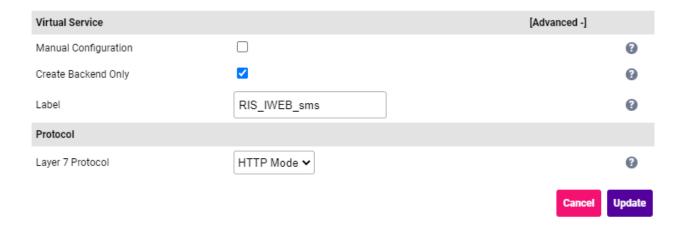


- Select (Check) Create Backend Only.
- Specify an appropriate *Label* for the Virtual Service, e.g. **RIS_IWEB_sms**.
- Leave the Layer 7 Protocol set to HTTP Mode.



- 4. Click **Update** to create the Virtual Service.
- 5. Now click **Modify** next to the newly created VIP.
- 6. Scroll to the Health Checks section.
 - Set the Check Type to Negotiate HTTP (GET).
 - Set the Request to Send to /ec/0.
 - Set Response Expected to Equals and set the value to 200.
- 7. Leave all other settings at their default value.
- 8. Click Update.

9.9.8.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer* 7 *Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

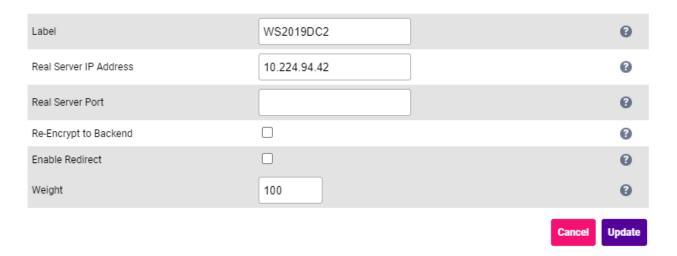

- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the *Real Server IP Address* field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click **Update**.
- 5. Repeat these steps to add additional Real Server(s).


9.9.9. VIP 1-B8 - RIS_IWEB_gbad

9.9.9.1. Virtual Service (VIP) Configuration

- Using the WebUI, navigate to Cluster Configuration > Layer 7 Virtual Services and click Add a new Virtual Service.
- 2. Click [Advanced].




3. Enter the following details:

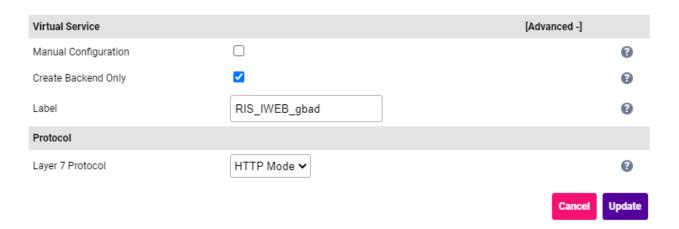

- Select (Check) Create Backend Only.
- Specify an appropriate Label for the Virtual Service, e.g. RIS_IWEB_gbad.
- Leave the *Layer 7 Protocol* set to **HTTP Mode**.
- 4. Click **Update** to create the Virtual Service.
- 5. Now click **Modify** next to the newly created VIP.
- 6. Scroll to the Health Checks section.
 - Set the Check Type to Negotiate HTTP (GET).
 - Set the *Request to Send* to /ec/gbad/0.
 - Set *Response Expected* to **Equals** and set the value to **1**.
- 7. Leave all other settings at their default value.
- 8. Click Update.

9.9.9.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

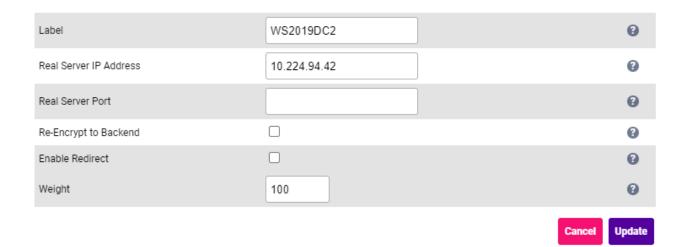


- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the Real Server IP Address field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.10. VIP 1-B9 - RIS_IWEBP_ws

9.9.10.1. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Click [Advanced].
- 3. Enter the following details:

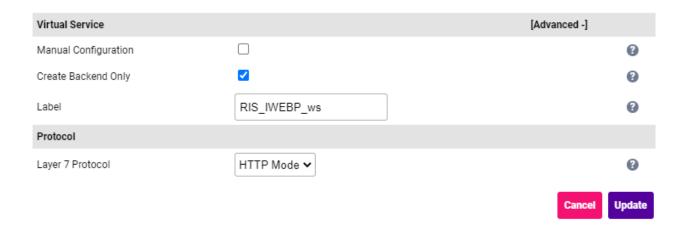


- Select (Check) Create Backend Only.
- Specify an appropriate *Label* for the Virtual Service, e.g. **RIS_IWEBP_ws**.
- Leave the Layer 7 Protocol set to HTTP Mode.
- 4. Click **Update** to create the Virtual Service.
- 5. Now click **Modify** next to the newly created VIP.
- 6. Scroll to the Health Checks section.
 - Set the Check Type to External Script.
 - Set the check Script to Ping_IPv4_or_Ping_IPv6.
- 7. Leave all other settings at their default value.
- 8. Click Update.

9.9.10.2. Define the Associated Real Servers (RIPs)

1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 – Real Servers* and click **Add a new Real**Server next to the newly created VIP.



2. Enter the following details:

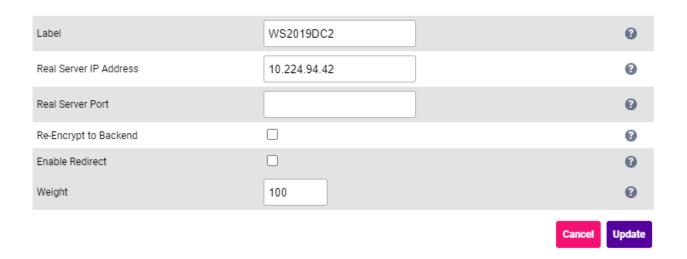


- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the Real Server IP Address field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.11. VIP 2 - Patient_Assistance

9.9.11.1. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Enter the following details:

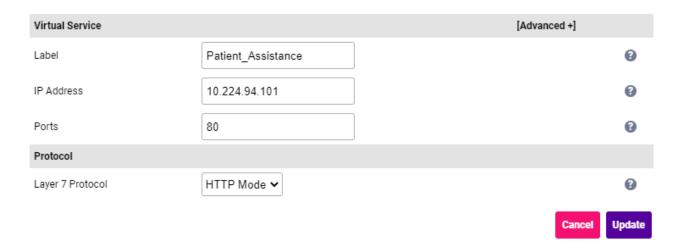

- Specify an appropriate Label for the Virtual Service, e.g. Patient_Assistance.
- Set the Virtual Service IP Address field to the required IP address, e.g. 10.224.94.101.



- Set the Ports field to 80.
- Set the Layer 7 Protocol to HTTP Mode.
- 3. Click **Update** to create the Virtual Service.
- 4. Now click **Modify** next to the newly created VIP.
- 5. Scroll to the **Persistence** section.
 - Ensure that the Persistence Mode is set to None.
- 6. Scroll to the *Health Checks* section.
 - Set the Check Type to Neogtiate HTTP (GET).
 - Set Request to Send to /CSHRIS-SGH11_6R20/RISWebServer/api/HealthCheck/HealthCheck.

Note CSHRIS-SGH11_6R20 is the current RIS core application folder name on the RIS servers.

- Set Response Expected to Equals and set the value to true.
- 7. Scroll to the ACL Rules section, and click the Add Rule button.
- 8. Set the **Type** to *Freetype* and copy and paste the following ACL rules into the *Freetype* field ensuring that the "#" is removed.

(!) Important

When text is copied from a pdf document that extends beyond 1 line, additional unwanted line feed formatting characters are included. Before pasting the text into the *Freetype* field, first copy the text to an editor such as Windows Notepad, then edit the text so that each ACL rule is on a single line (ACL rules start with "acl", "http-request" or "use_backend"), making sure there's a space between text that was on different lines. Once complete, copy and paste this text into the *Freetype* field. If this is not done, syntax checking will fail when the HAProxy service is re-started.


```
acl form path,url_dec -m reg -i ^/web/forms.?
acl patient path,url_dec -m reg -i ^/patientportal.?
acl webEnding path,url_dec -m reg -i ^/web/(globals.bundle.js|index.html)
acl webApp path,url_dec -m reg -i ^/web/app/light\?shs=.+
acl webNumber path,url_dec -m reg -i ^/web/\d+/[^.]+\.[^.]*\.?\w+
acl risweb path,url_dec -m reg -i ^/[^/]+/riswebserver/api/.+
acl authAny path,url_dec -m reg -i ^/[^/]*/authenticationserver/(oauth|api)/.+
acl blockAuth path,url_dec -m reg -i
^/[^/]+/authenticationserver/(oauth/token|api/changepassword)
http-request reject unless patient || webEnding || webNumber || webApp || risweb || authAny ||
forms
use_backend RIS_WEB if patient || webEnding || webNumber || webApp { nbsrv(RIS_WEB) gt 0 }
use_backend RIS_Auth if authAny !blockAuth { nbsrv(RIS_Auth) gt 0 }
use_backend RIS_Auth if authAny !blockAuth { nbsrv(RIS_Auth) gt 0 }
```

- 9. Click **OK** to save and close the ACL.
- 10. Leave all other settings at their default value.

11. Click Update.

9.9.11.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

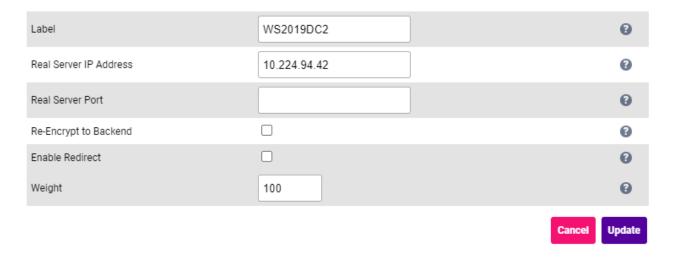

- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the *Real Server IP Address* field to the required IP address, e.g. **10.224.94.42**.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.11.3. Upload the SSL Certificate

8 Note

If the production certificate is not currently available, continue to the next section (configuring SSL Termination) and leave *SSL Certificate* set to **Default Self Signed Certificate**. Once you have the production certificate, follow the steps in this section to upload the certificate and then navigate to *Cluster Configuration > SSL Termination*, click **Modify** next to the SSL termination, change *SSL Certificate* to the new certificate and click **Update**.

- 1. Using the WebUI, navigate to *Cluster Configuration > SSL Certificate* and click **Add a new SSL Certificate**.
- 2. Select the option **Upload prepared PEM/PFX file**.
- 3. Enter the following details:

I would like to:	 Upload prepared PEM/PFX file Create a new SSL Certificate Signing Request (CSR) Create a new Self-Signed SSL Certificate. 	•
Label	patient-assistance-cert	•
File to upload	Choose File patient-assince-cert.pem	0
		Upload Certificate

- Specify an appropriate Label, e.g. patient-assistance-cert.
- Click Choose File.
- Browse to and select the relevant PEM or PFX file.
- For PFX files specify the password if required.
- 4. Click Upload Certificate.

Note

If you don't have a certificate and want to create a Certificate Signing Request (CSR) on the load balancer, please refer to Generating a CSR on the Load Balancer.

9.9.11.4. Configuring SSL Termination

- 1. Using the WebUI, navigate to Cluster Configuration > SSL Termination and click Add a new Virtual Service.
- 2. Enter the following details:



Using the Associated Virtual Service drop-down, select the Virtual Service created above, e.g.
 Patient_Assistance.

Note Once the VIP is selected, the *Label* field will be auto-populated with **SSL-**


Patient_Assistance. This can be changed if preferred.

- Ensure that the Virtual Service Port is set to 443.
- Leave SSL Operation Mode set to High Security.
- Select the required SSL Certificate.
- 3. Leave all other settings at their default value.
- 4. Click Update.

9.9.12. VIP 3 - R2I

9.9.12.1. Create the Custom Health Check

- 1. Using the WebUI, navigate to *Cluster Configuration > Health Check Scripts* and click **Add New Health Check**.
- 2. Enter the following details:

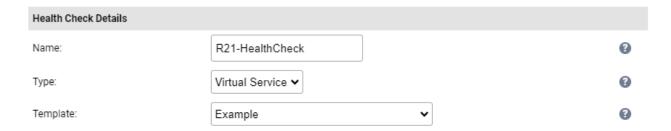

- Specify an appropriate *Label* for the health check, e.g. **R2I-HealthCheck**.
- Ensure that Type is to Virtual Service.
- Leave Template set to Example.
- Delete all existing text in the script edit window.
- Copy the following text into the script edit window:

```
#!/bin/bash

PATH="/usr/local/sbin:/usr/local/bin:/sbin:/usr/sbin:/usr/bin"
# Command Line Parameters
# VIRTUAL_IP=${1}
# VIRTUAL_PORT=${2}
REAL_IP=${3}
REAL_PORT="5050"


RESULT=$(echo $'\v'\<PerformSelfTest\/\>$'\x1c'$'\r' | nc -vw 3 ${REAL_IP} ${REAL_PORT})

if echo ${RESULT} | grep 'WS_CONNECTION valid="Y"';
    then
        exit 0
    else
        exit 1
fi
```

• Click Update.

9.9.12.2. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 4 Virtual Services* and click **Add a new Virtual Service**.
- 2. Enter the following details:

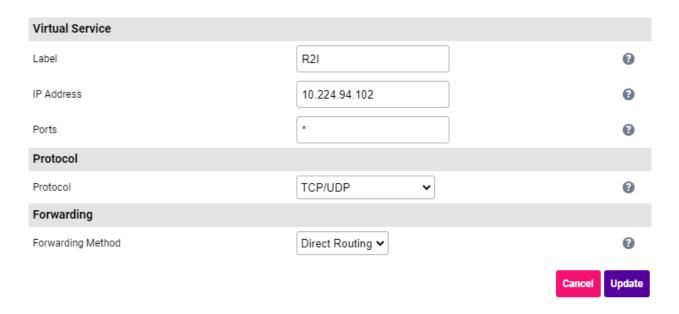


- Specify an appropriate *Label* for the Virtual Service, e.g. **R2I**.
- Set the Virtual Service IP Address field to the required IP address, e.g. 10.224.94.102.
- Set the *Ports* field to * (i.e. an asterisk this means all ports).
- Set the Protocol to TCP/UDP.
- Leave the Forwarding Method set to Direct Routing.
- 3. Click **Update** to create the Virtual Service.
- 4. Now click **Modify** next to the newly created VIP.
- 5. Scroll to the *Persistence* section.
 - Set the Persistence Mode to None.
- 6. Scroll to the Health Checks section.
 - Set the Check Type to External Script.
 - Set the *Check Script* to the health check created above, e.g. **R2I-HealthCheck**.
- 7. Leave all other settings at their default value.
- 8. Click Update.

9.9.12.3. Define the Associated Real Servers (RIPs)

1. Using the WebUI, navigate to: *Cluster Configuration > Layer 4 – Real Servers* and click **Add a new Real**Server next to the newly created VIP.

2. Enter the following details:

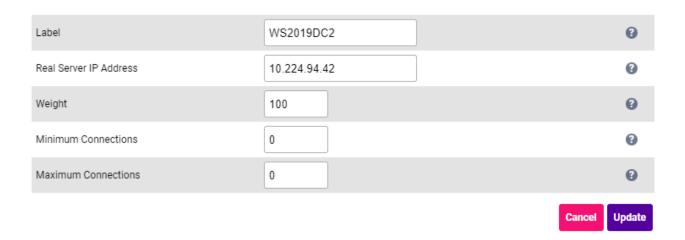


- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the Real Server IP Address field to the required IP address, e.g. 10.224.94.42.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.13. VIP 4 - EIS

9.9.13.1. Virtual Service (VIP) Configuration

- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 4 Virtual Services* and click **Add a new Virtual Service**.
- 2. Enter the following details:

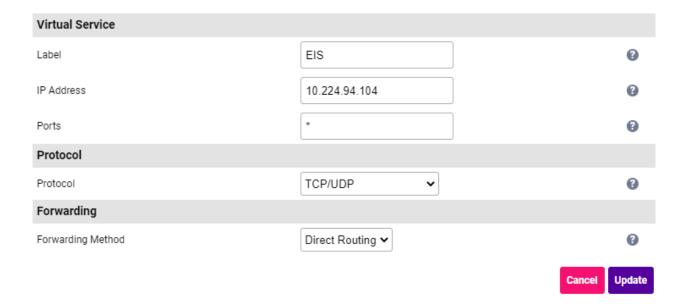


- Specify an appropriate Label for the Virtual Service, e.g. EIS.
- Set the Virtual Service IP Address field to the required IP address, e.g. 10.224.94.104.

- Set the *Ports* field to * (i.e. an asterisk this means all ports).
- Set the *Protocol* to **TCP/UDP**.
- Leave the Forwarding Method set to Direct Routing.
- 3. Click **Update** to create the Virtual Service.
- 4. Now click **Modify** next to the newly created VIP.
- 5. Scroll to the *Health Checks* section.
 - Set the *Check Type* to **Negotiate**.
 - Set the Check Port to 4444.
 - Set the *Protocol* to **HTTP**.
 - Set the Request to Send to HealthCheck.
 - Set the Response Expected to ok.
- 6. Leave all other settings at their default value.
- 7. Click **Update**.

9.9.13.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 4 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

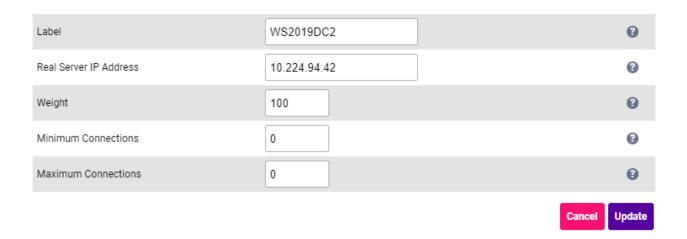


- Specify an appropriate Label for the RIP, e.g. WS2019DC2.
- Set the Real Server IP Address field to the required IP address, e.g. 10.224.94.42.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.14. VIP 5 - External_SMS

9.9.14.1. Virtual Service (VIP) Configuration



- 1. Using the WebUI, navigate to *Cluster Configuration > Layer 7 Virtual Services* and click **Add a new Virtual Service**.
- 2. Enter the following details:

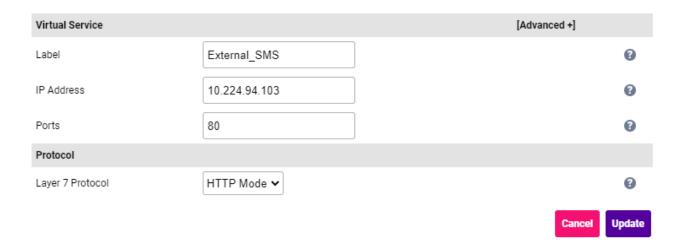


- Specify an appropriate *Label* for the Virtual Service, e.g. **External_SMS**.
- Set the Virtual Service IP Address field to the required IP address, e.g. 10.224.94.103.
- Set the Ports field to 80.
- Set the Layer 7 Protocol to HTTP Mode.
- 3. Click **Update** to create the Virtual Service.
- 4. Now click **Modify** next to the newly created VIP.
- 5. Scroll to the ACL Rules section, and click the Add Rule button.
- 6. Set the **Type** to *Freetype* and copy and paste the following ACL rules into the *Freetype* field ensuring that the "#" is removed.

```
acl ec path,url_dec -m reg -i ^/ec.?
http-request reject unless ec
```

- 7. Click **OK** to save and close the ACL.
- 8. Leave all other settings at their default value.
- 9. Click Update.

9.9.14.2. Define the Associated Real Servers (RIPs)

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

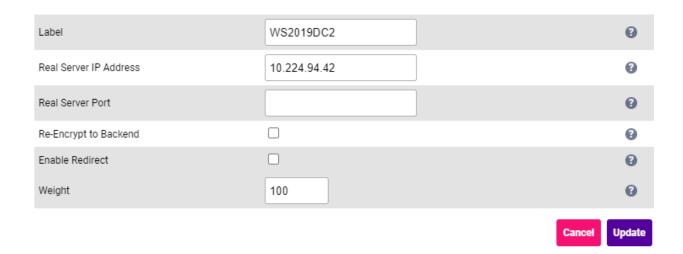


- Specify an appropriate *Label* for the RIP, e.g. **WS2019DC2**.
- Set the *Real Server IP Address* field to the required IP address, e.g. 10.224.94.42.
- Leave the Real Server Port field blank.
- 3. Leave all other settings at their default value.
- 4. Click Update.
- 5. Repeat these steps to add additional Real Server(s).

9.9.14.3. Upload the SSL Certificate

8 Note

If the production certificate is not currently available, continue to the next section (configuring SSL Termination) and leave *SSL Certificate* set to **Default Self Signed Certificate**. Once you have the production certificate, follow the steps in this section to upload the certificate and then navigate to *Cluster Configuration > SSL Termination*, click **Modify** next to the SSL termination, change *SSL Certificate* to the new certificate and click **Update**.

- 1. Using the WebUI, navigate to Cluster Configuration > SSL Certificate and click Add a new SSL Certificate.
- 2. Select the option **Upload prepared PEM/PFX file**.
- 3. Enter the following details:

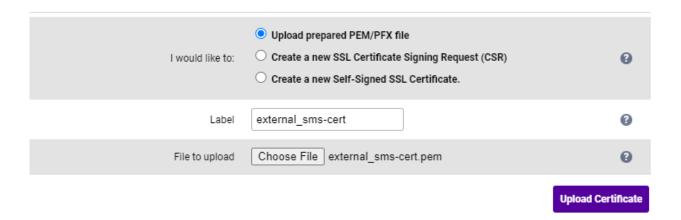

Specify an appropriate Label, e.g. external_sms-cert.




- Click Choose File.
- Browse to and select the relevant PEM or PFX file.
- For PFX files specify the password if required.
- 4. Click Upload Certificate.

f Note

If you don't have a certificate and want to create a Certificate Signing Request (CSR) on the load balancer, please refer to Generating a CSR on the Load Balancer.

9.9.14.4. Configuring SSL Termination

- 1. Using the WebUI, navigate to Cluster Configuration > SSL Termination and click Add a new Virtual Service.
- 2. Enter the following details:

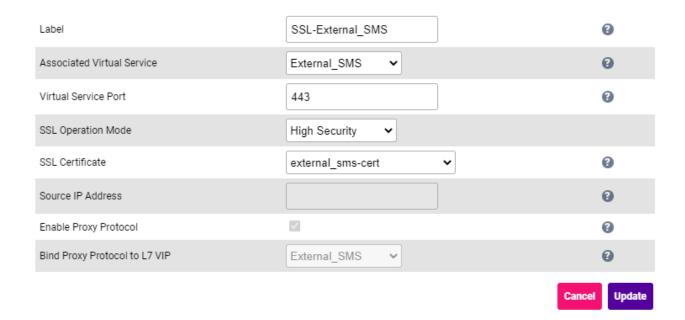

Using the Associated Virtual Service drop-down, select the Virtual Service created above, e.g.
 External_SMS.



- Ensure that the Virtual Service Port is set to 443.
- Leave SSL Operation Mode set to High Security.
- Select the required SSL Certificate.
- 3. Leave all other settings at their default value.
- 4. Click **Update**.

9.9.15. Finalizing the Configuration

To apply the new settings, HAProxy & STunnel must be reloaded. This can be done using the button in the

"Commit changes" box at the top of the screen or by using the Restart Services menu option:

- 1. Using the WebUI, navigate to: *Maintenance > Restart Services*.
- 2. Click Reload HAProxy.
- 3. Click Reload STunnel.

10. Configuring RIS Components to use the Load Balancer

The RIS core application must be configured to use the VIP on the load balancer.

In the non-HLB environment, the RIS database and RIS services/applications are configured to use the server IP or machine name.

In an HLB environment, the server IP or machine name is replaced by a virtual IP.

During the HLB Reconfiguration flow a RIS environment will be repointed to use the HLB virtual IP.

The RIS system configuration details are stored in two different locations:

- 1. Database tables
- 2. Configuration files

One table must be updated to point to a HLB VIP into a RIS schema:

1. WEBSERVICE, URL field

There are several configuration files in the RIS Schema ServiceTools menu that need to be repointed to the VIP of the HLB.

Related RIS Services:

- 1. Application Server Philips\RisAppServerWinService.exe.config
- 2. Document Generator Philips\DocumentGenerationWorker.exe.config
- 3. RIS Agent Philips\RisAgent.exe.config
- 4. R2I Philips\R2Interface.exe.config


Involved RIS Components:

- 1. Authentication Server \AuthenticationServer\web.config
- 2. GUI \GUI\Configuration\r2WorkstationConfig.htm
- 3. GUI64\GUI64\Configuration\r2WorkstationConfig.htm
- 4. EnterpriseManagerWS\EnterpriseManagerWS\web.config
- 5. InstantMessageWS\RISServicesWS\web.config



- 6. RISServicesWS\RISWebServer\web.config
- 7. GUIWeb\GUIWeb\globals.bundle.js (Also require update to port number and SSL status)
- 8. WEB Service 64 \WS\web.config

The HLB Reconfiguration script can be launched from the RIS Installer and activated on the RIS Database Server to make the required changes.

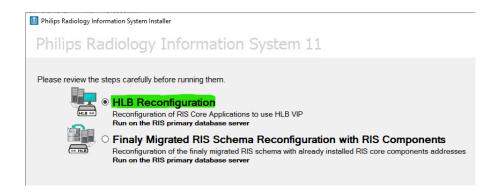

This must be performed from the RIS primary database server.

11. Testing & Verification

8 Note

For additional guidance on diagnosing and resolving any issues you may have, please also refer to Diagnostics & Troubleshooting.

The System Overview can be accessed via the WebUI. It shows a graphical view of all VIPs & RIPs (i.e. the RIS servers) and shows the state/health of each server as well as the state of each cluster as a whole. The example below shows that all RIS servers are healthy (green) and available to accept connections:

	VIRTUAL SERVICE ♦	IP ♦	PORTS ♦	CONNS ♦	PROTOCOL ♦	METHOD ♦	MODE ♦	
Î	№ RIS	10.224.94.100	80	0	HTTP	Layer 7	Proxy	NW.
1	Patient_Assistan	10.224.94.101	80	0	HTTP	Layer 7	Proxy	WW.
1	R2I	10.224.94.102	*	0	TCPUDP	Layer 4	DR	<u>ww</u>
1	EIS	10.224.94.104	*	0	TCPUDP	Layer 4	DR	<u>ww</u>
1		10.224.94.103	80	0	HTTP	Layer 7	Proxy	<u>ww</u>
1	RIS_EM	-	-	0	HTTP	Layer 7	Proxy	<u>ww</u>
1	RIS_IM	-	-	0	HTTP	Layer 7	Proxy	<u>ww</u>
1	RIS_RISServicesW	-	-	0	HTTP	Layer 7	Proxy	<u>ww</u>
1	RIS_Auth	-	-	0	HTTP	Layer 7	Proxy	<u>ww</u>
1	RIS_WS	-	-	0	HTTP	Layer 7	Proxy	<u>w</u>
1	RIS_WEB	-	-	0	HTTP	Layer 7	Proxy	<u>w</u>
1	RIS_IWEB_sms	-	-	0	HTTP	Layer 7	Proxy	<u>w</u>
Î	RIS_IWEB_gbad	-	-	0	HTTP	Layer 7	Proxy	W
1	RIS_IWEBP_ws	-	-	0	HTTP	Layer 7	Proxy	W

If one of the servers within a cluster fails its health check, that server will be colored red and the cluster will be colored yellow as shown below:

<u> </u>	Patient_Assistan	10.224.94.101	80	0	HTTP	Layer 7	Proxy	N.M
	REAL SERVER	IP	PORTS	WEIGHT	CONNS			
1	WS2019DC2	10.224.94.42	80	100	0	Drain	Halt	P.AV
÷	WS2019DC4	10.224.94.38	80	100	0	Drain	Halt	RAW

If the services are up (green) verify that clients can connect to the VIPs and access all services.

Note Make sure that DNS points at the VIPs rather than individual servers.

Once you have completed the verification process, continue to the next section and add a Secondary appliance to

12. Configuring HA - Adding a Secondary Appliance

Our recommended configuration is to use a clustered HA pair of load balancers to provide a highly available and resilient load balancing solution. We recommend that the Primary appliance is fully configured first, then the Secondary appliance can be added to create an HA pair. Once the HA pair is configured, load balanced services must be configured and modified on the Primary appliance. The Secondary appliance will be automatically kept in sync.

The clustered HA pair uses Heartbeat to determine the state of the other appliance. Should the active device (normally the Primary) suffer a failure, the passive device (normally the Secondary) will take over.

12.1. Non-Replicated Settings

A number of settings are not replicated as part of the Primary/Secondary pairing process and therefore must be manually configured on the Secondary appliance. These are listed by WebUI menu option in the table below:

WebUI Main Menu Option	Sub Menu Option	Description
Local Configuration	Hostname & DNS	Hostname and DNS settings
Local Configuration	Network Interface Configuration	Interface IP addresses, bonding configuration and VLANs
Local Configuration	Routing	Default gateways and static routes
Local Configuration	System Date & time	Time and date related settings
Local Configuration	Physical – Advanced Configuration	Various appliance settings
Local Configuration	Portal Management	Portal management settings
Local Configuration	Security	Security settings
Local Configuration	SNMP Configuration	SNMP settings
Local Configuration	Graphing	Graphing settings
Local Configuration	License Key	Appliance licensing
Maintenance	Backup & Restore	Local XML backups
Maintenance	Software Updates	Appliance software updates
Maintenance	Fallback Page	Fallback page configuration
Maintenance	Firewall Script	Firewall (iptables) configuration
Maintenance	Firewall Lockdown Wizard	Appliance management lockdown settings

(!) Important

Make sure that where any of the above have been configured on the Primary appliance, they're also configured on the Secondary.


12.2. Configuring the HA Clustered Pair

8 Note

If you have already run the firewall lockdown wizard on either appliance, you'll need to ensure that it is temporarily disabled on both appliances whilst performing the pairing process.


- 1. Deploy a second appliance that will be the Secondary and configure initial network settings.
- 2. Using the WebUI on the Primary appliance, navigate to: *Cluster Configuration > High-Availability Configuration*.

Create a Clustered Pair

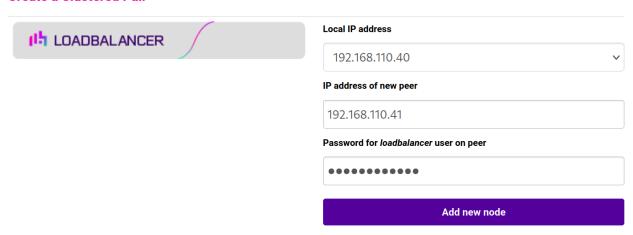

- 3. Specify the IP address and the *loadbalancer* user's password for the Secondary (peer) appliance as shown in the example above.
- 4. Click Add new node.
- 5. The pairing process now commences as shown below:

Create a Clustered Pair

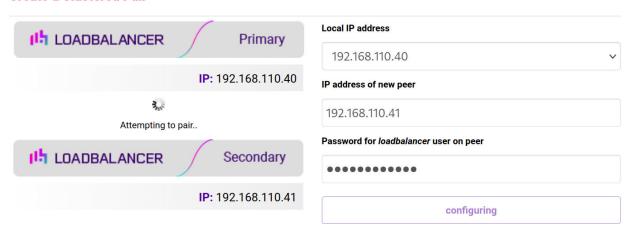


6. Once complete, the following will be displayed on the Primary appliance:

High Availability Configuration - primary



7. To finalize the configuration, restart heartbeat and any other services as prompted in the "Commit changes" message box at the top of the screen.

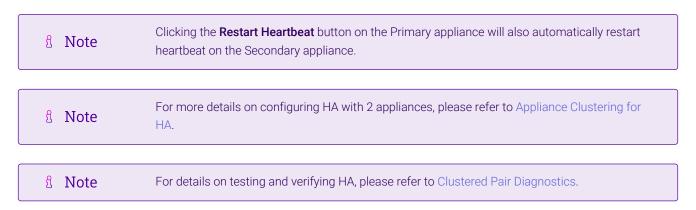


13. Optional Appliance Configuration

13.1. SNMP Configuration

The appliance supports SNMP v1, v2 and v3.

To configure SNMP:

1. Using the WebUI, navigate to: Local Configuration > SNMP Configuration.

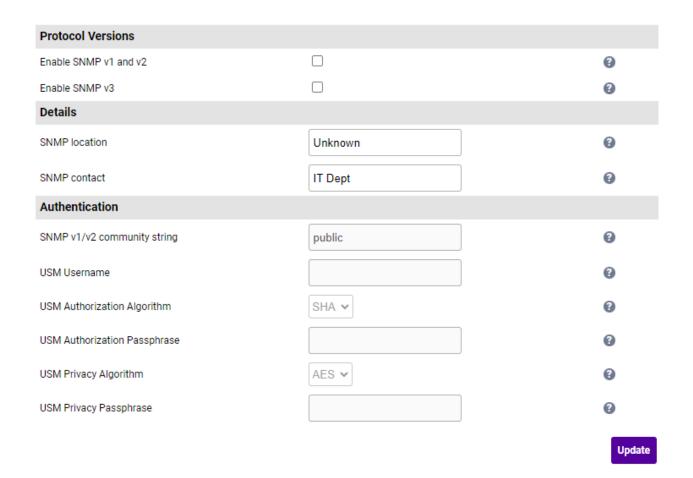

- 2. Enable the required SNMP version(s).
- 3. Enter the required **SNMP location** and **SNMP contact**.
- 4. For SNMP v1 & v2:
 - Enter the required SNMP v1/v2 community string.
- 5. For SNMP v3:
 - Specify the *USM Username*.
 - Select the required **USM Authorization Algorithm**.
 - Specify the USM Authorization Passphrase, it should be at least 8 characters.
 - Select the required USM Privacy Algorithm.
 - Specify USM Privacy Passphrase, it should be at least 8 characters.
- 6. Click Update.
- 7. Restart SNMPD using the **Restart SNMPD** button at the top of the screen.

please refer to SNMP Reporting.

Note

Valid characters for the Community string, USM Username, USM Authorization Passphrase and USM Privacy Passphrase fields are: a-z A-Z 0-9 [] # ~ _ *! = - \$ % ? {} @ :; ^

For more information about the various OIDs and associated MIBs supported by the appliance,

8 Note

If you need to change the port, IP address or protocol that SNMP listens on, please refer to Service Socket Addresses.

13.2. Configuring Email Alerts for Virtual Services

Email alerts can be configured for layer 4 and layer 7 Virtual Services. This enables emails to be sent when one or more of the associated Real Servers fail their health check and also when they subsequently start to pass their health check.

13.2.1. Layer 4

For layer 4 Virtual Services, settings can be configured globally for all VIPs or individually per VIP.

13.2.1.1. Global Layer 4 Email Settings

Once configured, these settings apply to all layer 4 VIPs by default.

To configure global email alert settings for layer 4 services:

1. Using the WebUI, navigate to: Cluster Configuration > Layer 4 Advanced Configuration.



2. Enter an appropriate email address in the *Email Alert Source Address* field.

```
e.g. lb1@loadbalancer.org
```

3. Enter an appropriate email address in the *Email Alert Destination Address* field.

```
e.g. alerts@loadbalancer.org
```

4. Click Update.

13.2.1.2. VIP Level Settings



Once configured, these settings apply to the individual VIP.

To configure VIP level email alerts:



- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 4 Virtual Service* and click **Modify** next to the VIP to be configured.
- 2. Scroll down to the Fallback Server section.



3. Enter an appropriate email address in the *Email Alert Destination Address* field.

e.g. alerts@loadbalancer.org

4. Click Update.


Note
You can set the *Email Alert Source Address* field as explained above if required to configure a default source address.

13.2.2. Layer 7

For layer 7 services, email settings are configured globally for all VIPs.

To configure global email alert settings for layer 7 services:

1. Using the WebUI, navigate to: Cluster Configuration > Layer 7 Advanced Configuration.

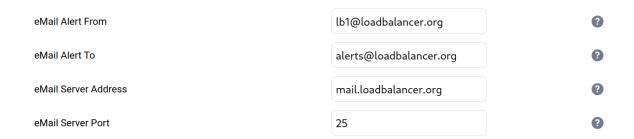

2. Enter an appropriate email address in the eMail Alert From field.



3. Enter an appropriate email address in the eMail Alert To field.

e.g. alerts@loadbalancer.org

4. Enter an appropriate IP address/FQDN in the eMail Server Address field.

e.g. mail.loadbalancer.org

5. Enter an appropriate port in the eMail Server Port field.

e.g. 25


6. Click **Update**.

13.3. Configuring Email Alerts for Heartbeat

Email alerts can be setup for heartbeat once a clustered pair has been configured. This enables alerts to be sent when the primary/secondary communication state has changed. This can occur when the secondary appliance takes over from the primary, when the primary takes over from the secondary and also when there is a communication issue between the 2 appliances.

To configure email alert settings for Heartbeat:

- 1. Using the WebUI, navigate to: *Cluster Configuration > Heartbeat Configuration*.
- 2. Scroll down to the **Email Alerts** section.



- 3. Enter an appropriate email address in the *Email Alert Destination Address* field.
- 4. Enter an appropriate email address in the *Email Alert Source Address* field.
- 5. Click Modify Heartbeat Configuration.

13.4. Configuring a Smart Host (SMTP relay)

For Heartbeat (and layer 4 services), email alerts are sent from the load balancer directly to the mail server defined in the destination domain's DNS MX record by default. Alternatively, a custom smart host (mail relay server) can be specified. A smart host is an email server through which approved devices can send emails. Where possible, we recommend that you use a smart host for email alerts as this often helps improve the deliverability of emails.

To configure a Smart Host:

- 1. Using the WebUI, navigate to: Local Configuration > Physical Advanced Configuration.
- 2. Scroll down to the SMTP Relay section.
- 3. Specify the FQDN or IP address of the Smart Host.
- 4. Click **Update**.
- By default the *Smart Host* is set as the destination email domain's DNS MX record when the *Email Alert Destination Address* is configured. It must either be left at its default setting or a

14. Technical Support

If you require any assistance please contact support@loadbalancer.org.

15. Further Documentation

For additional information, please refer to the Administration Manual.

16. Appendix


16.1. Generating a CSR on the Load Balancer

If you have an SSL certificate in either PFX or PEM file format, this can be uploaded to the Load balancer using the certificate upload option. Alternatively, you can create a Certificate Signing Request (CSR) on the load balancer and send this to your chosen CA to create a new certificate.

To generate a CSR:

- 1. Using the WebUI, navigate to: Cluster Configuration > SSL Certificates.
- 2. Click Add a new SSL Certificate & select Create a New SSL Certificate (CSR).

Add a new SSL Certificate

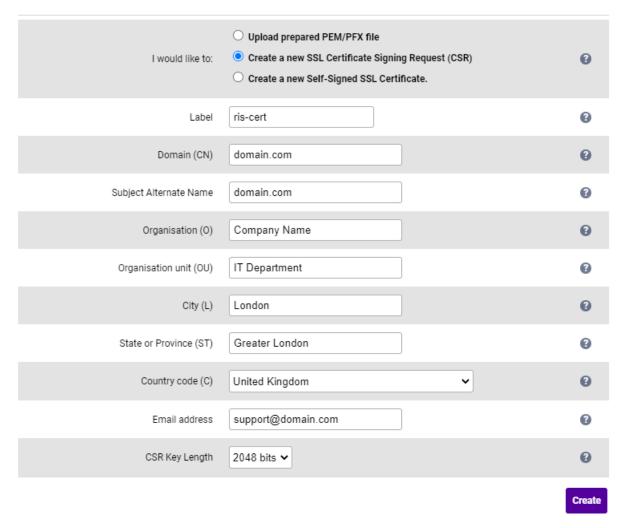

- 3. Enter a suitable Label (name) for the certificate.
- 4. Populate the remaining fields according to your requirements.
 - Note To specify multiple SANs, separate each name with a comma.

- 5. Once all fields are complete click **Create**.
- 6. To view the CSR click **Modify** next to the new certificate, then expand the Certificate Signing Request (CSR) section.
- 7. Copy the CSR and send this to your chosen CA.
- 8. Once received, copy/paste your signed certificate into the *Your Certificate* section.
- 9. Intermediate and root certificates can be copied/pasted into the *Intermediate Certificate* and *Root Certificate* sections as required.
- 10. Click **Update** to complete the process.

The new certificate will now be displayed under *Cluster Configuration > SSL Certificates*.

17. Document Revision History

Version	Date	Change	Reason for Change	Changed By
1.0	22 March 2024	Initial version		RJC
1.1	03 April 2024	Consolidated all ACLs into a single Freetype ACL for VIP1 - RIS	Easier & faster to configure	RJC
		Added ACLs for VIP2 - Patient_Assistance & VIP5 - External_SMS	Technical requirement	



Visit us: www.loadbalancer.org

Phone us: +44 (0)330 380 1064

Phone us: +1 833 274 2566

Email us: info@loadbalancer.org

Follow us: @loadbalancer.org

About Loadbalancer.org

Loadbalancer.org's mission is to ensure that its clients' businesses are never interrupted. The load balancer experts ask the right questions to get to the heart of what matters, bringing a depth of understanding to each deployment. Experience enables Loadbalancer.org engineers to design less complex, unbreakable solutions and to provide exceptional personalized support.

