

Load Balancing Epic EHR

Version 1.1.0



Table of Contents

1. About this Guide	3
2. Loadbalancer.org Appliances Supported	3
3. Software Versions Supported	3
3.1. Loadbalancer.org Appliance	3
3.2. Epic EHR	3
4. Epic EHR	3
5. Load Balancing Epic EHR	3
5.1. Persistence (aka Server Affinity)	4
5.2. Virtual Service (VIP) Requirements	4
5.3. Port Requirements	4
6. Deployment Concept	4
7. Loadbalancer.org Appliance – the Basics	5
7.1. Virtual Appliance	5
7.2. Initial Network Configuration	5
7.3. Accessing the Appliance WebUI	5
Main Menu Options	7
7.4. Appliance Software Update	8
Determining the Current Software Version	8
Checking for Updates using Online Update	8
Using Offline Update	8
7.5. Ports Used by the Appliance	9
7.6. HA Clustered Pair Configuration	10
8. Appliance Configuration for Epic EHR	10
8.1. Configuring VIP 1 – Hyperspace	10
Configuring the Virtual Service (VIP)	10
Defining the Real Servers (RIPs)	11
8.2. Configuring VIP 2 – Hyperspace Redirect	11
Configuring the Virtual Service (VIP)	11
8.3. Configuring VIP 3 – MyChart (Optional)	12
Configuring the Virtual Service (VIP)	12
Defining the Real Servers (RIPs)	13
8.4. Configuring VIP 4 – MyChart Redirect (Optional)	13
Configuring the Virtual Service (VIP)	13
8.5. Finalizing the Configuration	14
9. Testing & Verification	14
9.1. Using System Overview	14
10. Technical Support	15
11. Further Documentation	15
12. Appendix	16
12.1. Configuring HA - Adding a Secondary Appliance	16
Non-Replicated Settings	16
Configuring the HA Clustered Pair	17
13. Document Revision History	19

1. About this Guide

This guide details the steps required to configure a load balanced Epic EHR environment utilizing Loadbalancer.org appliances. It covers the configuration of the load balancers and also any Epic EHR configuration changes that are required to enable load balancing.

For more information about initial appliance deployment, network configuration and using the Web User Interface (WebUI), please also refer to the [Administration Manual](#).

2. Loadbalancer.org Appliances Supported

All our products can be used with Epic EHR. For full specifications of available models please refer to <https://www.loadbalancer.org/products>.

Some features may not be available or fully supported in all cloud platforms due to platform specific limitations. For more details, please refer to the "Main Differences to our Standard (Non-Cloud) Product" section in the appropriate cloud platform [Quick Start Guide](#) or check with Loadbalancer.org support.

3. Software Versions Supported

3.1. Loadbalancer.org Appliance

- V8.9.1 and later

Note

The screenshots used throughout this document aim to track the latest Loadbalancer.org software version. If you're using an older version, or the very latest, the screenshots presented here may not match your WebUI exactly.

3.2. Epic EHR

- All versions

4. Epic EHR

The Epic EHR (Electronic Health Records) software suite brings together essential tools for clinicians and patients in the healthcare space.

Epic Hyperspace is a clinician-facing platform. It's a front-end client used to access most parts of the Epic software suite, including patient charts, prescribing, and even print services.

Epic MyChart is a patient-facing web portal. It gives patients the ability to view their medical records and test results, manage their appointments and prescriptions, and more.

5. Load Balancing Epic EHR

Note

It's highly recommended that you have a working Epic EHR environment first before



5.1. Persistence (aka Server Affinity)

The Epic EHR applications require sessions to stick to the same real server. Source IP address affinity is used to achieve this.

5.2. Virtual Service (VIP) Requirements

To provide load balancing and HA for Epic EHR, the following VIPs are required:

- Hyperspace
- Hyperspace redirect (to force inbound HTTP traffic to use HTTPS)

Optionally, additional VIPs may be required as follows:


- MyChart
- MyChart redirect (to force inbound HTTP traffic to use HTTPS)

5.3. Port Requirements

The following table shows the ports that are load balanced:

Port	Protocols	Use
80	TCP/HTTP	Redirect to HTTPS (not strictly load balanced)
443	TCP/HTTPS	Web Services

6. Deployment Concept

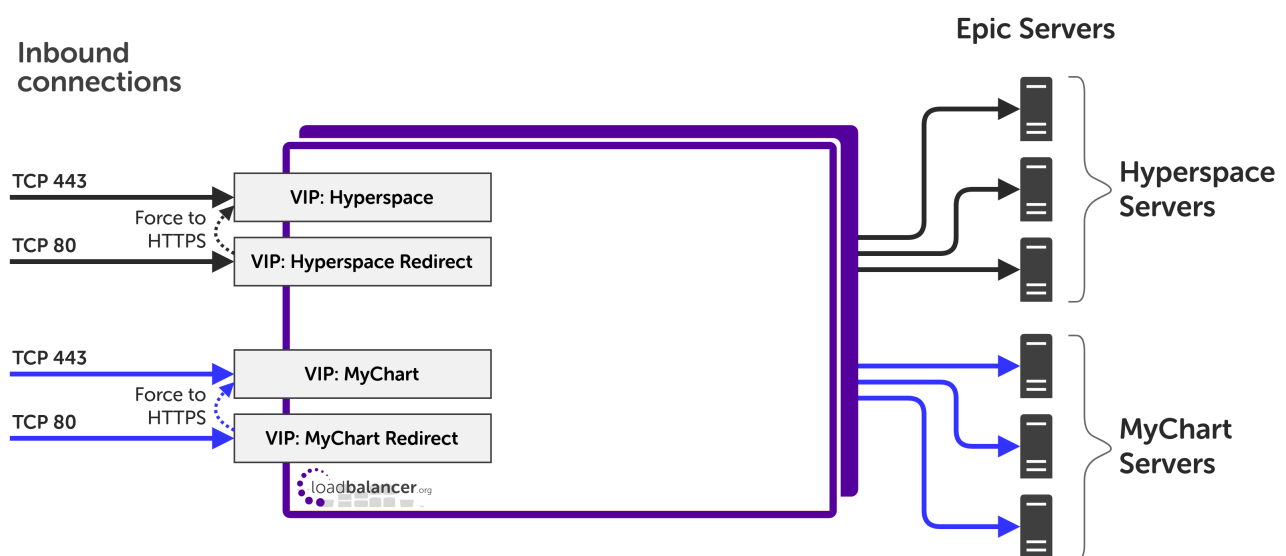

VIP = Virtual IP Address

Note

The load balancer can be deployed as a single unit, although Loadbalancer.org recommends a clustered pair for resilience & high availability. Please refer to the section [Configuring HA - Adding a Secondary Appliance](#) in the appendix for more details on configuring a clustered pair.

7. Loadbalancer.org Appliance – the Basics

7.1. Virtual Appliance

A fully featured, fully supported 30 day trial is available if you are conducting a PoC (Proof of Concept) deployment. The VA is currently available for VMware, Virtual Box, Hyper-V, KVM, XEN and Nutanix AHV and has been optimized for each Hypervisor. By default, the VA is allocated 2 vCPUs, 4GB of RAM and has a 20GB virtual disk. The Virtual Appliance can be downloaded [here](#).

Note

The same download is used for the licensed product, the only difference is that a license key file (supplied by our sales team when the product is purchased) must be applied using the appliance's WebUI.

Note

Please refer to [Virtual Appliance Installation](#) and the ReadMe.txt text file included in the VA download for additional information on deploying the VA using the various Hypervisors.

Note

The VA has 4 network adapters. For VMware only the first adapter (**eth0**) is connected by default. For HyperV, KVM, XEN and Nutanix AHV all adapters are disconnected by default. Use the network configuration screen within the Hypervisor to connect the required adapters.

7.2. Initial Network Configuration

After boot up, follow the instructions on the appliance console to configure the management IP address, subnet mask, default gateway, DNS servers and other network and administrative settings.

Important

Be sure to set a secure password for the load balancer, when prompted during the setup routine.

7.3. Accessing the Appliance WebUI

The WebUI is accessed using a web browser. By default, users are authenticated using Apache authentication. Users can also be authenticated against LDAP, LDAPS, Active Directory or Radius - for more information, please refer to [External Authentication](#).

Note

There are certain differences when accessing the WebUI for the cloud appliances. For details, please refer to the relevant [Quick Start / Configuration Guide](#).

1. Using a browser, navigate to the following URL:

`https://<IP-address-configured-during-the-network-setup-wizard>:9443/lbadmin/`





Note

You'll receive a warning about the WebUI's SSL certificate. This is due to the default self signed certificate that is used. If preferred, you can upload your own certificate - for more information, please refer to [Appliance Security Features](#).



Note

If you need to change the port, IP address or protocol that the WebUI listens on, please refer to [Service Socket Addresses](#).

2. Log in to the WebUI using the following credentials:

Username: loadbalancer

Password: <configured-during-network-setup-wizard>



Note

To change the password, use the WebUI menu option: **Maintenance > Passwords**.

Once logged in, the WebUI will be displayed as shown below:

Primary | Secondary Active | Passive Link 15 Seconds

System Overview

Local Configuration

Cluster Configuration

Maintenance

View Configuration

Reports

Logs

Support

Live Chat

WARNING: YOUR TRIAL IS DUE TO EXPIRE IN 30 DAYS.

Buy with confidence. All purchases come with a 90 day money back guarantee. Already bought? Enter your license key [here](#)

[Buy Now](#)

System Overview ? 2024-03-15 16:27:21 UTC

Would you like to run the Setup Wizard?

[Accept](#) [Dismiss](#)

VIRTUAL SERVICE IP PORTS CONNS PROTOCOL METHOD MODE

No Virtual Services configured.

Network Bandwidth

Bytes/s

Thu 18:00 Fri 00:00 Fri 06:00 Fri 12:00

RX 3k Min, 4k Avg, 32675k Total, 6k Min, 7k Avg, 56693k Total

System Load Average

System Load

Thu 18:00 Fri 00:00 Fri 06:00 Fri 12:00

1m average 0.00 Min, 0.12 Avg, 0.60 Max
5m average 0.00 Min, 0.06 Avg, 0.21 Max
15m average 0.00 Min, 0.02 Avg, 0.08 Max

Memory Usage

3. You'll be asked if you want to run the Setup Wizard which can be used to configure layer 7 services. Click **Dismiss** if you're following a guide or want to configure the appliance manually or click **Accept** to start the wizard.

Main Menu Options

System Overview - Displays a graphical summary of all VIPs, RIPs and key appliance statistics

Local Configuration - Configure local host settings such as IP address, DNS, system time etc.

Cluster Configuration - Configure load balanced services such as VIPs & RIPs

Maintenance - Perform maintenance tasks such as service restarts and taking backups

View Configuration - Display the saved appliance configuration settings

Reports - View various appliance reports & graphs

Logs - View various appliance logs

Support - Create a support download, contact the support team & access useful links

Live Chat - Start a live chat session with one of our Support Engineers

7.4. Appliance Software Update

To ensure that the appliance(s) are running the latest software version, we recommend a software update check is performed.

Determining the Current Software Version

The software version is displayed at the bottom of the WebUI as shown in the example below:

Copyright © Loadbalancer.org Inc. 2002 – 2024
ENTERPRISE VA Max - v8.11.1

English ▼

Checking for Updates using Online Update

Note

By default, the appliance periodically contacts the Loadbalancer.org update server and checks for updates. An update check can also be manually triggered as detailed below.

1. Using the WebUI, navigate to: **Maintenance > Software Update**.
2. Select **Online Update**.
3. If the latest version is already installed, a message similar to the following will be displayed:

Information: Version v8.11.1 is the current release. No updates are available

4. If an update is available, you'll be presented with a list of new features, improvements, bug fixes and security related updates.
5. Click **Online Update** to start the update process.

Note

Do not navigate away whilst the update is ongoing, this may cause the update to fail.

6. Once complete (the update can take several minutes depending on download speed and upgrade version) the following message will be displayed:

Information: Update completed successfully.

7. If services need to be reloaded/restarted or the appliance needs a full restart, you'll be prompted accordingly.

Using Offline Update

If the load balancer does not have access to the Internet, offline update can be used.





Note

Please contact support@loadbalancer.org to check if an update is available and obtain the latest offline update files.

To perform an offline update:

1. Using the WebUI, navigate to: **Maintenance > Software Update**.
2. Select **Offline Update**.
3. The following screen will be displayed:

Software Update

Offline Update

The following steps will lead you through offline update.

1. Contact **Loadbalancer.org support** to obtain the offline update archive and checksum.
2. Save the archive and checksum to your local machine.
3. Select the archive and checksum files in the upload form below.
4. Click *Upload and Install* to begin the update process.

Archive: No file chosen

Checksum: No file chosen

4. Select the *Archive* and *Checksum* files.
5. Click **Upload and Install**.
6. If services need to be reloaded/restarted or the appliance needs a full restart, you'll be prompted accordingly.

7.5. Ports Used by the Appliance

By default, the appliance uses the following TCP & UDP ports:

Protocol	Port	Purpose
TCP	22 *	SSH
TCP & UDP	53 *	DNS / GSLB
TCP & UDP	123	NTP
TCP & UDP	161 *	SNMP
UDP	6694	Heartbeat between Primary & Secondary appliances in HA mode
TCP	7778	HAProxy persistence table replication
TCP	9000 *	Gateway service (Centralized/Portal Management)
TCP	9080 *	WebUI - HTTP (disabled by default)
TCP	9081 *	Nginx fallback page



Protocol	Port	Purpose
TCP	9443 *	WebUI - HTTPS
TCP	25565 *	Shuttle service (Centralized/Portal Management)

Note

The ports used for SSH, GSLB, SNMP, the WebUI, the fallback page, the gateway service and the shuttle service can be changed if required. For more information, please refer to [Service Socket Addresses](#).

7.6. HA Clustered Pair Configuration

Loadbalancer.org recommend that load balancer appliances are deployed in pairs for high availability. In this guide a single unit is deployed first, adding a secondary unit is covered in the section [Configuring HA - Adding a Secondary Appliance](#) of the appendix.

8. Appliance Configuration for Epic EHR

8.1. Configuring VIP 1 – Hyperspace

Configuring the Virtual Service (VIP)

1. Using the web user interface, navigate to *Cluster Configuration > Layer 7 – Virtual Services* and click on **Add a new Virtual Service**.
2. Define the **Label** for the virtual service as required, e.g. **Hyperspace**.
3. Set the **Virtual Service IP Address** field to the required IP address, e.g. **192.168.85.150**.
4. Set the **Ports** field to **443**.
5. Set the **Layer 7 Protocol** to **TCP Mode**.
6. Click **Update** to create the virtual service.

Layer 7 - Add a new Virtual Service

Virtual Service

[Advanced +]

Label

Hyperspace

?

IP Address

192.168.85.150

?

Ports

443

?

Protocol

Layer 7 Protocol

TCP Mode

▼

?

Cancel

Update

7. Click **Modify** next to the newly created VIP.
8. In the **Persistence** section click **Advanced** to expand the menu.
9. Set **Timeout** to **60** (the default units are minutes).



10. Click **Update**.

Persistence		[Advanced]
Persistence Mode	Source IP	?
Persistence	Timeout	60

Defining the Real Servers (RIPs)

1. Using the web user interface, navigate to *Cluster Configuration > Layer 7 – Real Servers* and click on **Add a new Real Server** next to the newly created VIP.
2. Define the **Label** for the real server as required, e.g. **Hyperspace_Srv_1**.
3. Set the **Real Server IP Address** field to the required IP address, e.g. **192.168.85.200**.
4. Click **Update**.
5. Repeat these steps to add additional servers as required.

Layer 7 Add a new Real Server - Hyperspace

Label	Hyperspace_Srv_1	?
Real Server IP Address	192.168.85.200	?
Real Server Port		?
Re-Encrypt to Backend	<input type="checkbox"/>	?
Weight	100	?

CancelUpdate

8.2. Configuring VIP 2 – Hyperspace Redirect

Configuring the Virtual Service (VIP)

1. Using the web user interface, navigate to *Cluster Configuration > Layer 7 – Virtual Services* and click on **Add a new Virtual Service**.
2. Define the **Label** for the virtual service as required, e.g. **Hyperspace_redirect**.
3. Set the **Virtual Service IP Address** field to the **same** IP address used for the Hyperspace VIP, e.g. **192.168.85.150**.
4. Set the **Ports** field to **80**.
5. Set the **Layer 7 Protocol** to **HTTP Mode**.
6. Click **Update** to create the virtual service.

Layer 7 - Add a new Virtual Service

Virtual Service		[Advanced +]
Label	<input type="text" value="Hyperspace_redirect"/>	?
IP Address	<input type="text" value="192.168.85.150"/>	?
Ports	<input type="text" value="80"/>	?
Protocol		
Layer 7 Protocol	<input type="text" value="HTTP Mode"/>	?

- Click **Modify** next to the newly created VIP.
- In the **Other** section click **Advanced** to expand the menu.
- Set **Force to HTTPS** to **Yes**.
- Click **Update**.

Force to HTTPS

☒ Yes ☐ No

8.3. Configuring VIP 3 – MyChart (Optional)

Configuring the Virtual Service (VIP)

- Using the web user interface, navigate to *Cluster Configuration > Layer 7 – Virtual Services* and click on **Add a new Virtual Service**.
- Define the **Label** for the virtual service as required, e.g. **MyChart**.
- Set the **Virtual Service IP Address** field to the required IP address, e.g. **192.168.85.151**.
- Set the **Ports** field to **443**.
- Set the **Layer 7 Protocol** to **TCP Mode**.
- Click **Update** to create the virtual service.

Layer 7 - Add a new Virtual Service

Virtual Service		[Advanced +]
Label	<input type="text" value="MyChart"/>	?
IP Address	<input type="text" value="192.168.85.151"/>	?
Ports	<input type="text" value="443"/>	?
Protocol		
Layer 7 Protocol	<input type="text" value="TCP Mode"/>	?



- Click **Modify** next to the newly created VIP.
- In the *Persistence* section click **Advanced** to expand the menu.
- Set *Timeout* to **60** (the default units are minutes).
- Click **Update**.

Persistence		[Advanced]
Persistence Mode	Source IP	?
Persistence	Timeout	60

Defining the Real Servers (RIPs)

- Using the web user interface, navigate to *Cluster Configuration > Layer 7 – Real Servers* and click on **Add a new Real Server** next to the newly created VIP.
- Define the *Label* for the real server as required, e.g. **MyChart_Srv_1**.
- Set the *Real Server IP Address* field to the required IP address, e.g. **192.168.85.210**.
- Click **Update**.
- Repeat these steps to add additional servers as required.

Layer 7 Add a new Real Server - MyChart

Label	MyChart_Srv_1	?
Real Server IP Address	192.168.85.210	?
Real Server Port		?
Re-Encrypt to Backend	<input type="checkbox"/>	?
Weight	100	?

Cancel
Update

8.4. Configuring VIP 4 – MyChart Redirect (Optional)

Note

If the optional *MyChart* VIP has been configured then this redirect VIP must also be configured to ensure proper operation of the load balanced MyChart service.

Configuring the Virtual Service (VIP)

- Using the web user interface, navigate to *Cluster Configuration > Layer 7 – Virtual Services* and click on **Add a new Virtual Service**.
- Define the *Label* for the virtual service as required, e.g. **MyChart_redirect**.
- Set the *Virtual Service IP Address* field to the **same** IP address used for the MyChart VIP, e.g. **192.168.85.151**.
- Set the *Ports* field to **80**.



5. Set the *Layer 7 Protocol* to **HTTP Mode**.
6. Click **Update** to create the virtual service.

Layer 7 - Add a new Virtual Service

Virtual Service		[Advanced +]
Label	<input type="text" value="MyChart_redirect"/>	?
IP Address	<input type="text" value="192.168.85.151"/>	?
Ports	<input type="text" value="80"/>	?
Protocol		
Layer 7 Protocol	<input type="text" value="HTTP Mode"/>	?

Cancel Update

7. Click **Modify** next to the newly created VIP.
8. In the *Other* section click **Advanced** to expand the menu.
9. Set *Force to HTTPS* to **Yes**.
10. Click **Update**.

Force to HTTPS

☒ Yes ☐ No

8.5. Finalizing the Configuration

To apply the new settings, HAProxy must be reloaded. This can be done using the button in the "Commit changes" box at the top of the screen or by using the **Restart Services** menu option:

1. Using the WebUI, navigate to: **Maintenance > Restart Services**.
2. Click **Reload HAProxy**.

9. Testing & Verification



















Note

For additional guidance on diagnosing and resolving any issues you may have, please also refer to [Diagnostics & Troubleshooting](#).

9.1. Using System Overview

The System Overview can be viewed in the WebUI. It shows a graphical view of all VIPs & RIPs (i.e. the Hyperspace and MyChart servers) and shows the state/health of each server as well as the state of the cluster as a whole. The example below shows that all servers of both services are healthy and available to accept connections:



	VIRTUAL SERVICE	IP	PORTS	CONNS	PROTOCOL	METHOD	MODE	
	Hyperspace	192.168.85.150	443	0	TCP	Layer 7	Proxy	
	REAL SERVER	IP	PORTS	WEIGHT	CONNS			
	Hyperspace_Srv_1	192.168.85.200	443	100	0	Drain	Halt	
	Hyperspace_Srv_2	192.168.85.201	443	100	0	Drain	Halt	
	Hyperspace_Srv_3	192.168.85.202	443	100	0	Drain	Halt	
	Hyperspace_redir..	192.168.85.150	80	0	HTTP	Layer 7	Proxy	
	MyChart	192.168.85.151	443	0	TCP	Layer 7	Proxy	
	REAL SERVER	IP	PORTS	WEIGHT	CONNS			
	MyChart_Srv_1	192.168.85.210	443	100	0	Drain	Halt	
	MyChart_Srv_2	192.168.85.211	443	100	0	Drain	Halt	
	MyChart_redirect..	192.168.85.151	80	0	HTTP	Layer 7	Proxy	

10. Technical Support

For more details about configuring the appliance and assistance with designing your deployment please don't hesitate to contact the support team using the following email address: support@loadbalancer.org.

11. Further Documentation

For additional information, please refer to the [Administration Manual](#).

12. Appendix

12.1. Configuring HA - Adding a Secondary Appliance

Our recommended configuration is to use a clustered HA pair of load balancers to provide a highly available and resilient load balancing solution. We recommend that the Primary appliance is fully configured first, then the Secondary appliance can be added to create an HA pair. Once the HA pair is configured, load balanced services must be configured and modified on the Primary appliance. The Secondary appliance will be automatically kept in sync.

Note

For Enterprise Azure, the HA pair should be configured first. For more information, please refer to the Azure Quick Start/Configuration Guide available in the [documentation library](#)

The clustered HA pair uses Heartbeat to determine the state of the other appliance. Should the active device (normally the Primary) suffer a failure, the passive device (normally the Secondary) will take over.

Non-Replicated Settings

A number of settings are not replicated as part of the Primary/Secondary pairing process and therefore must be manually configured on the Secondary appliance. These are listed by WebUI menu option in the table below:

WebUI Main Menu Option	Sub Menu Option	Description
Local Configuration	Hostname & DNS	Hostname and DNS settings
Local Configuration	Network Interface Configuration	Interface IP addresses, bonding configuration and VLANs
Local Configuration	Routing	Default gateways and static routes
Local Configuration	System Date & time	Time and date related settings
Local Configuration	Physical – Advanced Configuration	Various appliance settings
Local Configuration	Portal Management	Portal management settings
Local Configuration	Security	Security settings
Local Configuration	SNMP Configuration	SNMP settings
Local Configuration	Graphing	Graphing settings
Local Configuration	License Key	Appliance licensing
Maintenance	Backup & Restore	Local XML backups
Maintenance	Software Updates	Appliance software updates
Maintenance	Fallback Page	Fallback page configuration
Maintenance	Firewall Script	Firewall (iptables) configuration
Maintenance	Firewall Lockdown Wizard	Appliance management lockdown settings

⚠ Important

Make sure that where any of the above have been configured on the Primary appliance, they're also configured on the Secondary.


Configuring the HA Clustered Pair

📌 Note

If you have already run the firewall lockdown wizard on either appliance, you'll need to ensure that it is temporarily disabled on both appliances whilst performing the pairing process.

1. Deploy a second appliance that will be the Secondary and configure initial network settings.
2. Using the WebUI on the Primary appliance, navigate to: **Cluster Configuration > High-Availability Configuration**.

Create a Clustered Pair

 **LOADBALANCER**

Local IP address


IP address of new peer

Password for loadbalancer user on peer

Add new node


3. Specify the IP address and the *loadbalancer* user's password for the Secondary (peer) appliance as shown in the example above.
4. Click **Add new node**.
5. The pairing process now commences as shown below:

Create a Clustered Pair

 **LOADBALANCER** **Primary**

IP: 192.168.110.40

Attempting to pair..

 **LOADBALANCER** **Secondary**

IP: 192.168.110.41

Local IP address

IP address of new peer


Password for loadbalancer user on peer


configuring

6. Once complete, the following will be displayed on the Primary appliance:




High Availability Configuration - primary


 **LOADBALANCER**



Primary

IP: 192.168.110.40

 **LOADBALANCER**



Secondary

IP: 192.168.110.41

Break Clustered Pair

- To finalize the configuration, restart heartbeat and any other services as prompted in the "Commit changes" message box at the top of the screen.

Note

Clicking the **Restart Heartbeat** button on the Primary appliance will also automatically restart heartbeat on the Secondary appliance.

Note

For more details on configuring HA with 2 appliances, please refer to [Appliance Clustering for HA](#).

Note

For details on testing and verifying HA, please refer to [Clustered Pair Diagnostics](#).

13. Document Revision History

Version	Date	Change	Reason for Change	Changed By
1.0.0	22 February 2022	Initial version		AH
1.0.1	28 September 2022	Updated layer 7 VIP and RIP creation screenshots	Reflect changes in the web user interface	AH
1.0.2	5 January 2023	<p>Combined software version information into one section</p> <p>Added one level of section numbering</p> <p>Added software update instructions</p> <p>Added table of ports used by the appliance</p> <p>Reworded 'Further Documentation' section</p> <p>Removed references to the colour of certain UI elements</p>	Housekeeping across all documentation	AH
1.0.3	2 February 2023	Updated screenshots	Branding update	AH
1.0.4	7 March 2023	Removed conclusion section	Updates across all documentation	AH
1.1.0	24 March 2023	<p>New document theme</p> <p>Modified diagram colours</p>	Branding update	AH



Visit us: www.loadbalancer.org

Phone us: +44 (0)330 380 1064

Phone us: +1 833 274 2566

Email us: info@loadbalancer.org

Follow us: [@loadbalancer.org](https://twitter.com/loadbalancer.org)

About Loadbalancer.org

Loadbalancer.org's mission is to ensure that its clients' businesses are never interrupted. The load balancer experts ask the right questions to get to the heart of what matters, bringing a depth of understanding to each deployment. Experience enables Loadbalancer.org engineers to design less complex, unbreakable solutions - and to provide exceptional personalized support.

