

Load Balancing Oracle Application Server

Version 1.6.0



Table of Contents

1. About this Brief	
2. Loadbalancer.org Appliances Supported	
3. Software Versions Supported	
3.1. Loadbalancer.org Appliance	
3.2. Oracle Application Server / HTTP Server	
4. Oracle HTTP Server	
5. Load Balancing Oracle HTTP Server	
5.1. Virtual Service (VIP) Requirements	
5.2. SSL Termination	4
6. Deployment Concept	4
7. Load Balancer Deployment Methods	4
7.1. Layer 7 SNAT Mode	
8. Loadbalancer.org Appliance – the Basics	
8.1. Virtual Appliance	
8.2. Initial Network Configuration	6
8.3. Accessing the Appliance WebUI	6
8.3.1. Main Menu Options	
8.4. Appliance Software Update.	
8.4.1. Online Update	
8.4.2. Offline Update	9
8.5. Ports Used by the Appliance	9
8.6. Clustered Pair Configuration	
9. Deploying & Accessing the Appliance	
9.1. Deployment	
9.2. Accessing the Appliance WebUI	
9.2.1. Main Menu Options	
10. Appliance Configuration for Oracle HTTP Server	
10.1. VIP 1 - OHS-HTTP.	
10.1.1. Virtual Service Configuration	
10.1.2. Define the Real Servers (RIPs)	
10.1.3. Upload the SSL Certificate	
10.1.4. Configure SSL Termination	14
10.2. Finalizing the Configuration	
11. Oracle Application / HTTP Server Configuration	
12. Testing & Verification	
12.1. Using the System Overview	
12.2. Access the Application	
13. Technical Support	
14. Further Documentation	
15. Appendix	
15.1. Configuring HA - Adding a Secondary Appliance	
15.1.1. Non-Replicated Settings	
15.1.2. Configuring the HA Clustered Pair	
16. Document Revision History	19

1. About this Brief

This brief details the steps required to configure a load balanced Oracle HTTP Server environment utilizing Loadbalancer.org appliances. Oracle HTTP Server is the web server component of Oracle Application Server.

For more information about initial appliance deployment, network configuration and using the Web User Interface (WebUI), please also refer to the Administration Manual.

2. Loadbalancer.org Appliances Supported

All our products can be used with Oracle HTTP Server. For full specifications of available models please refer to https://www.loadbalancer.org/products/enterprise.

Some features may not be available or fully supported in all cloud platforms due to platform specific limitations. For more details, please refer to the "Main Differences to our Standard (Non-Cloud) Product" section in the appropriate cloud platform Quick Start Guide or check with Loadbalancer.org support.

3. Software Versions Supported

3.1. Loadbalancer.org Appliance

V8.9.1 and later

f Note

The screenshots used throughout this document aim to track the latest Loadbalancer.org software version. If you're using an older version, or the very latest, the screenshots presented here may not match your WebUI exactly.

3.2. Oracle Application Server / HTTP Server

v10 and later

4. Oracle HTTP Server

Oracle HTTP Server is the Web server component of Oracle Application Server. It's based on the Apache HTTP Server infrastructure and includes modules developed specifically by Oracle.

5. Load Balancing Oracle HTTP Server

8 Note

It's highly recommended that you have a working Oracle Application / HTTP Server environment first before implementing the load balancer.

5.1. Virtual Service (VIP) Requirements

To provide load balancing and HA for Oracle HTTP Server, the following VIP is required:

Ref.	VIP Name	Use	Mode	Port(s)	Persistence Mode	Health Check
VIP 1	OHS-HTTP	HTTP Server traffic	L7 SNAT	7777	HTTP Cookie	HTTP (GET)

8 Note	By default Oracle HTTP Server listens on TCP port 7777 and HTTPS is disabled.	

Note


The Virtual Service on the load balancer is configured to listen on port 80 and uses port translation to forward traffic on port 7777.

5.2. SSL Termination

SSL Termination is configured on the load balancer. This provides a corresponding HTTPS Virtual Service on port 443. Decrypted traffic is then load balanced and forwarded to the HTTP servers on port 7777.

6. Deployment Concept

Once the load balancer is deployed, clients connect to the Virtual Service (VIP) on the load balancer rather than directly to one of the Oracle HTTP Servers.

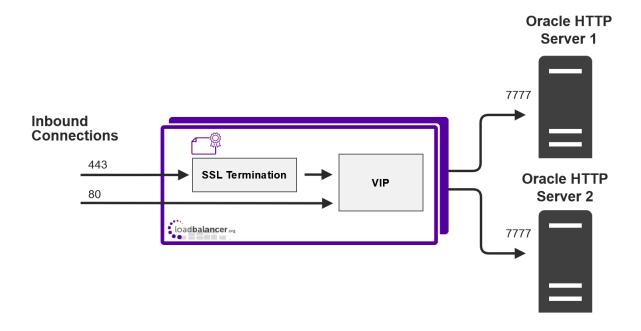

7. Load Balancer Deployment Methods

The load balancer can be deployed in 4 fundamental ways: Layer 4 DR mode, Layer 4 NAT mode, Layer 4 SNAT mode, and Layer 7 SNAT mode.


For Oracle HTTP Server, layer 7 SNAT mode is recommended. This mode is described below and is used for the configurations presented in this guide.

7.1. Layer 7 SNAT Mode

Layer 7 SNAT mode uses a proxy (HAProxy) at the application layer. Inbound requests are terminated on the load



balancer and HAProxy generates a new corresponding request to the chosen Real Server. As a result, Layer 7 is typically not as fast as the Layer 4 methods. Layer 7 is typically chosen when either enhanced options such as SSL termination, cookie based persistence, URL rewriting, header insertion/deletion etc. are required, or when the network topology prohibits the use of the layer 4 methods. The image below shows an example network diagram for this mode.

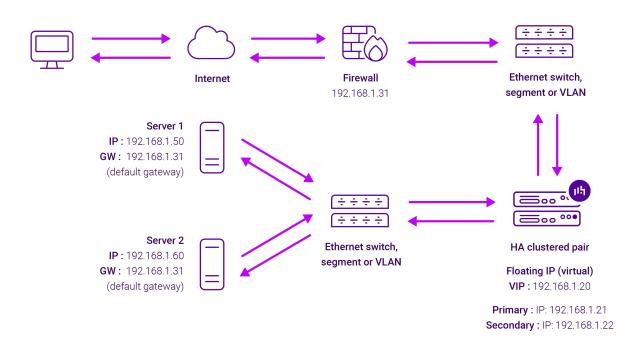

- Because layer 7 SNAT mode is a full proxy, Real Servers in the cluster can be on any accessible network including across the Internet or WAN.
- Layer 7 SNAT mode is not transparent by default, i.e. the Real Servers will not see the source IP address of the client, they will see the load balancer's own IP address by default, or any other local appliance IP address if preferred (e.g. the VIP address). This can be configured per layer 7 VIP. If required, the load balancer can be configured to provide the actual client IP address to the Real Servers in 2 ways. Either by inserting a header that contains the client's source IP address, or by modifying the Source Address field of the IP packets and replacing the IP address of the load balancer with the IP address of the client. For more information on these methods please refer to Transparency at Layer 7.
- Layer 7 SNAT mode can be deployed using either a one-arm or two-arm configuration. For two-arm deployments, **eth1** is typically used for client side connections and **eth0** is used for Real Server connections, although this is not mandatory since any interface can be used for any purpose.
- Requires no mode-specific configuration changes to the load balanced Real Servers.
- Port translation is possible with Layer 7 SNAT mode, e.g. VIP:80 → RIP:8080 is supported.
- You should not use the same RIP:PORT combination for layer 7 SNAT mode VIPs and layer 4 SNAT mode VIPs because the required firewall rules conflict.

8. Loadbalancer.org Appliance – the Basics

8.1. Virtual Appliance



A fully featured, fully supported 30 day trial is available if you are conducting a PoC (Proof of Concept) deployment. The VA is currently available for VMware, Virtual Box, Hyper-V, KVM, XEN and Nutanix AHV and has been optimized for each Hypervisor. By default, the VA is allocated 2 vCPUs, 4GB of RAM and has a 20GB virtual disk. The Virtual Appliance can be downloaded here.

8 Note	The same download is used for the licensed product, the only difference is that a license key file (supplied by our sales team when the product is purchased) must be applied using the appliance's WebUI.
8 Note	Please refer to Virtual Appliance Installation and the ReadMe.txt text file included in the VA download for additional information on deploying the VA using the various Hypervisors.
8 Note	The VA has 4 network adapters. For VMware only the first adapter (eth0) is connected by default. For HyperV, KVM, XEN and Nutanix AHV all adapters are disconnected by default. Use the network configuration screen within the Hypervisor to connect the required adapters.

8.2. Initial Network Configuration

After boot up, follow the instructions on the appliance console to configure the management IP address, subnet mask, default gateway, DNS servers and other network and administrative settings.

(!) Important Be sure to set a secure password for the load balancer, when prompted during the setup routine.

8.3. Accessing the Appliance WebUI

The WebUI is accessed using a web browser. By default, users are authenticated using Apache authentication. Users can also be authenticated against LDAP, LDAPS, Active Directory or Radius - for more information, please refer to External Authentication.

Note

There are certain differences when accessing the WebUI for the cloud appliances. For details, please refer to the relevant Quick Start / Configuration Guide.

1. Using a browser, navigate to the following URL:

https://<IP-address-configured-during-the-network-setup-wizard>:9443/lbadmin/

8 Note	You'll receive a warning about the WebUI's SSL certificate. This is due to the default self signed certificate that is used. If preferred, you can upload your own certificate - for more information, please refer to Appliance Security Features.
8 Note	If you need to change the port, IP address or protocol that the WebUI listens on, please refer to Service Socket Addresses.

2. Log in to the WebUI using the following credentials:




Username: loadbalancer

Password: <configured-during-network-setup-wizard>

8 Note

To change the password, use the WebUI menu option: *Maintenance > Passwords*.

Once logged in, the WebUI will be displayed as shown below:

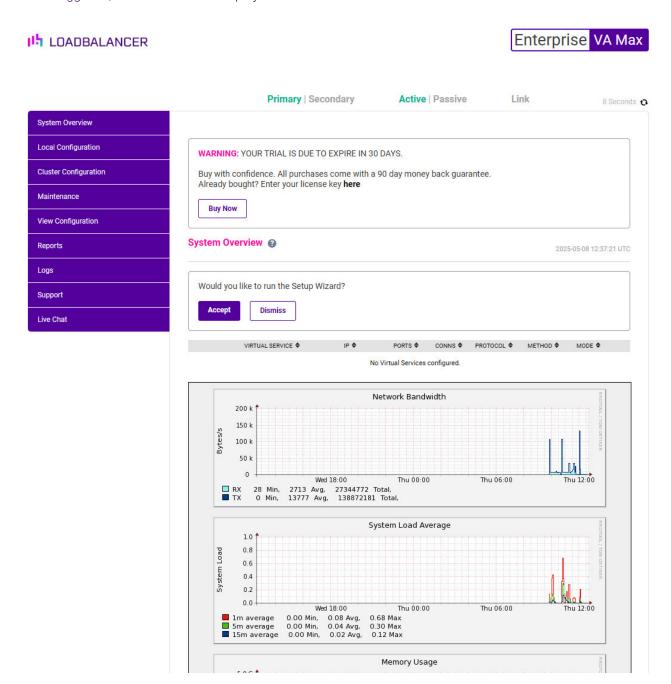

3. You'll be asked if you want to run the Setup Wizard. Click **Dismiss** if you're following a guide or want to configure the appliance manually. Click **Accept** to start the Setup Wizard.

8 Note

The Setup Wizard can only be used to configure Layer 7 services.

8.3.1. Main Menu Options



System Overview - Displays a graphical summary of all VIPs, RIPs and key appliance statistics

Local Configuration - Configure local host settings such as IP address, DNS, system time etc.

Cluster Configuration - Configure load balanced services such as VIPs & RIPs

Maintenance - Perform maintenance tasks such as service restarts and creating backups

View Configuration - Display the saved appliance configuration settings

Reports - View various appliance reports & graphs

Logs - View various appliance logs

Support - Create a support download, contact the support team & access useful links

Live Chat - Start a live chat session with one of our Support Engineers

8.4. Appliance Software Update

We recommend that the appliance is kept up to date to ensure that you benefit from the latest bug fixes, security updates and feature improvements. Both online and offline update are supported.

Note For full details, please refer to Appliance Software Update in the Administration Manual.

Services may need to be restarted/reloaded after the update process completes or in some

Note cases a full appliance restart may be required. We therefore recommend performing the update during a maintenance window.

8.4.1. Online Update

The appliance periodically contacts the Loadbalancer.org update server (**update.loadbalancer.org**) and checks for updates. This is the default behavior and can be disabled if preferred. If an update is found, a notification similar to the example below will be displayed at the top of the WebUI:

Information: Update 8.13.1 is now available for this appliance.

Online Update

Click **Online Update**. A summary of all new features, improvements, bug fixes and security updates included in the update will be displayed. Click **Update** at the bottom of the page to start the update process.

(1) Important Do not navigate away whilst the update is ongoing, this may cause the update to fail.

The update can take several minutes depending on download speed and upgrade version. Once complete, the following message will be displayed:

Information: Update completed successfully. Return to system overview.

If services need to be reloaded/restarted or the appliance needs a full restart, you'll be prompted accordingly.



8.4.2. Offline Update

If the appliance does not have access to the Internet, offline update can be used.

To check for the latest version, please refer to our product roadmap page available here. To obtain the latest offline update files contact support@loadbalancer.org.

To perform an offline update:


- 1. Using the WebUI, navigate to: Maintenance > Software Update.
- 2. Select Offline Update.
- 3. The following screen will be displayed:

Software Update

Offline Update

The following steps will lead you through offline update.

- 1. Contact Loadbalancer.org support to obtain the offline update archive and checksum.
- 2. Save the archive and checksum to your local machine.
- 3. Select the archive and checksum files in the upload form below.
- 4. Click Upload and Install to begin the update process.



- 4. Select the Archive and Checksum files.
- 5. Click **Upload and Install**.
- 6. If services need to be reloaded/restarted or the appliance needs a full restart, you'll be prompted accordingly.

8.5. Ports Used by the Appliance

By default, the appliance uses the following TCP & UDP ports:

Protocol	Port	Purpose
TCP	22 *	SSH
TCP & UDP	53 *	DNS / GSLB
TCP & UDP	123	NTP
TCP & UDP	161 *	SNMP
UDP	6694	Heartbeat between Primary & Secondary appliances in HA mode
TCP	7778	HAProxy persistence table replication
TCP	9000 *	Gateway service (Centralized/Portal Management)

Protocol	Port	Purpose
TCP	9080 *	WebUI - HTTP (disabled by default)
TCP	9081 *	Nginx fallback page
TCP	9443 *	WebUI - HTTPS
TCP	25565 *	Shuttle service (Centralized/Portal Management)

8 Note

The ports used for SSH, GSLB, SNMP, the WebUI, the fallback page, the gateway service and the shuttle service can be changed if required. For more information, please refer to Service Socket Addresses.

8.6. Clustered Pair Configuration

Loadbalancer.org recommend that load balancer appliances are deployed in pairs for high availability. In this guide a single unit is deployed first, adding a secondary unit is covered in Configuring HA - Adding a Secondary Appliance.

9. Deploying & Accessing the Appliance

9.1. Deployment

Deploy the Loadbalancer.org appliance as described in the relevant Quick Start / Configuration Guide.

9.2. Accessing the Appliance WebUI

The WebUI is accessed using a web browser. By default, users are authenticated using Apache authentication. Users can also be authenticated against LDAP, LDAPS, Active Directory or Radius - for more information, please refer to External Authentication.

8 Note

There are certain differences when accessing the WebUI for the cloud appliances. For details, please refer to the relevant Quick Start / Configuration Guide.

1. Using a browser, navigate to the following URL:

https://<IP-address-configured-during-the-network-setup-wizard>:9443/lbadmin/

8 Note

You'll receive a warning about the WebUl's SSL certificate. This is due to the default self signed certificate that is used. If preferred, you can upload your own certificate - for more information, please refer to Appliance Security Features.

8 Note

If you need to change the port, IP address or protocol that the WebUI listens on, please refer to Service Socket Addresses.

2. Log in to the WebUI using the following credentials:




Username: loadbalancer

Password: <configured-during-network-setup-wizard>

8 Note

To change the password, use the WebUI menu option: *Maintenance > Passwords*.

Once logged in, the WebUI will be displayed as shown below:

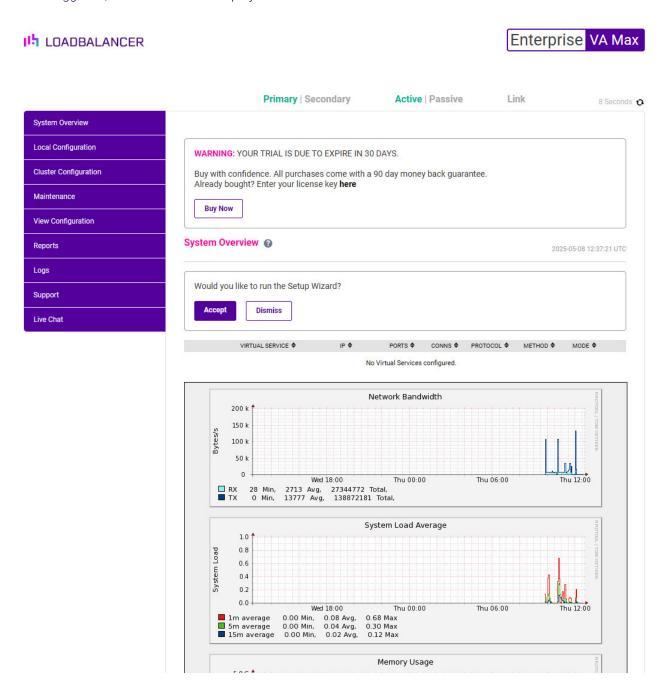

3. You'll be asked if you want to run the Setup Wizard. Click **Dismiss** if you're following a guide or want to configure the appliance manually. Click **Accept** to start the Setup Wizard.

Note The Setup Wizard

The Setup Wizard can only be used to configure Layer 7 services.

9.2.1. Main Menu Options



System Overview - Displays a graphical summary of all VIPs, RIPs and key appliance statistics

Local Configuration - Configure local host settings such as IP address, DNS, system time etc.

Cluster Configuration - Configure load balanced services such as VIPs & RIPs

Maintenance - Perform maintenance tasks such as service restarts and creating backups

View Configuration - Display the saved appliance configuration settings

Reports - View various appliance reports & graphs

Logs - View various appliance logs

Support - Create a support download, contact the support team & access useful links


Live Chat - Start a live chat session with one of our Support Engineers

10. Appliance Configuration for Oracle HTTP Server

10.1. VIP 1 - OHS-HTTP

10.1.1. Virtual Service Configuration

- Using the WebUI, navigate to: Cluster Configuration > Layer 7 Virtual Service and click Add a New Virtual Service.
- 2. Enter the following details:

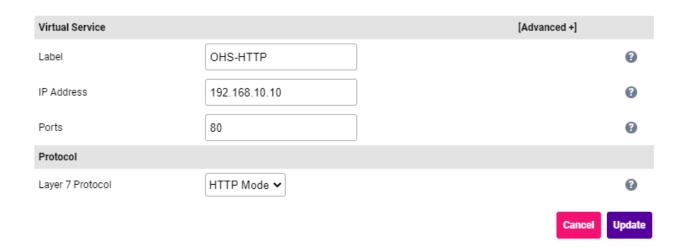

- 3. Enter an appropriate label for the VIP, e.g. OHS-HTTP.
- 4. Set the Virtual Service IP address field to the required IP address, e.g. 192.168.10.10.
- 5. Set the Virtual Service Ports field to 80.
- 6. Click Update.
- 7. Click **Modify** next to the newly created VIP.
- 8. Scroll to the **Health Checks** section and click [Advanced].
 - Set Health Checks to Negotiate HTTP (GET).
 - Leave Request to Send blank.
 - Leave Response Expected blank.




and HTTP 3xx responses will be considered as valid and the server will be marked as up.

- Set Check Port to 7777.
- 9. Scroll to the Other section and click [Advanced].
 - Enable (check) the *Timeout* check box and set the *Client Timeout* and *Real Server Timeout* to **30m**.
- 10. Click **Update**.

10.1.2. Define the Real Servers (RIPs)

The Real Servers (i.e. the Oracle HTTP Servers) must now be associated with the VIP.

- 1. Using the WebUI, navigate to: *Cluster Configuration > Layer 7 Real Servers* and click **Add a new Real**Server next to the newly created VIP.
- 2. Enter the following details:

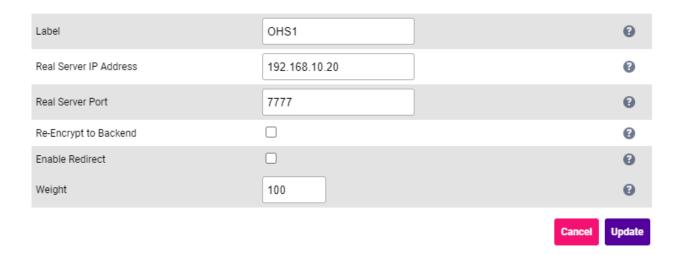

- 3. Enter an appropriate label for the RIP, e.g. OHS1.
- 4. Change the Real Server IP Address field to the required IP address, e.g. 192.168.10.20.
- 5. Change the *Real Server Port* field to 7777.
- 6. Click Update.
- 7. Repeat the above steps to add your other OHS Server(s).


10.1.3. Upload the SSL Certificate

Certificates in either PEM or PFX format can be uploaded.

To upload an SSL certificate:

- 1. Using the WebUI, navigate to Cluster Configuration > SSL Certificate and click Add a new SSL Certificate.
- 2. Select the option **Upload prepared PEM/PFX file**.


3. Enter the following details:

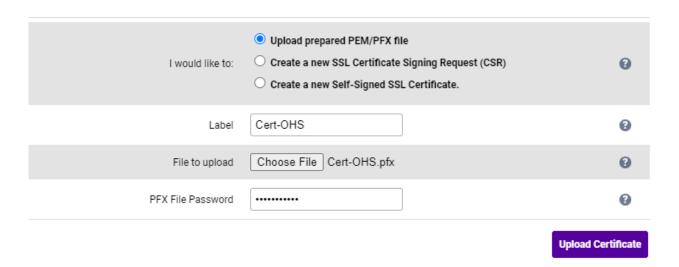

- 4. Specify an appropriate *Label*, e.g. **Cert-OHS**.
- 5. Click Choose File.
- 6. Browse to and select the relevant PEM or PFX file.
- 7. For PFX files specify the password if required.
- 8. Click Upload Certificate.

10.1.4. Configure SSL Termination

- 1. Using the WebUI, navigate to *Cluster Configuration > SSL Termination* and click **Add a new Virtual Service**.
- 2. Enter the following details:

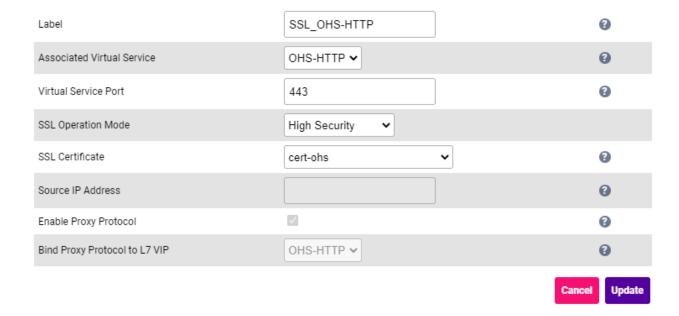

3. Using the Associated Virtual Service drop-down, select the Virtual Service created above, e.g. OHS-HTTP.



can be changed if preferred.

- 4. Ensure that the Virtual Service Port is set to 443.
- 5. Leave SSL Operation Mode set to High Security.
- 6. Select the SSL Certificate uploaded previously.
- 7. Click **Update**.

10.2. Finalizing the Configuration

To apply the new settings, HAProxy and STunnel must be reloaded. This can be done using the buttons in the "Commit changes" box at the top of the screen or by using the *Restart Services* menu option:

- 1. Using the WebUI, navigate to: Maintenance > Restart Services.
- 2. Click Reload HAProxy.
- 3. Click Reload STunnel.

11. Oracle Application / HTTP Server Configuration

Follow the steps in the section "Terminating SSL at the Load Balancer" in this Oracle article.

12. Testing & Verification

8 Note

For additional guidance on diagnosing and resolving any issues you may have, please also refer to Diagnostics & Troubleshooting.

12.1. Using the System Overview

The System Overview can be viewed in the WebUI. It shows a graphical view of all VIPs & RIPs (i.e. the Oracle HTTP servers) and shows the state/health of each server as well as the state of the cluster as a whole. The example below shows that all servers are healthy and available to accept connections:

12.2. Access the Application

First ensure that any DNS records that are used to access the application are updated so they resolve to the VIP. Then verify that you're able to successfully access the load balanced HTTP Servers / application.

13. Technical Support

For more details about configuring the appliance and assistance with designing your deployment please don't hesitate to contact the support team using the following email address: support@loadbalancer.org.

14. Further Documentation

For additional information, please refer to the Administration Manual.



15. Appendix

15.1. Configuring HA - Adding a Secondary Appliance

Our recommended configuration is to use a clustered HA pair of load balancers to provide a highly available and resilient load balancing solution. We recommend that the Primary appliance is fully configured first, then the Secondary appliance can be added to create an HA pair. Once the HA pair is configured, load balanced services must be configured and modified on the Primary appliance. The Secondary appliance will be automatically kept in sync.

Note

For Enterprise Azure, the HA pair should be configured first. For more information, please refer to the Azure Quick Start/Configuration Guide available in the documentation library

The clustered HA pair uses Heartbeat to determine the state of the other appliance. Should the active device (normally the Primary) suffer a failure, the passive device (normally the Secondary) will take over.

15.1.1. Non-Replicated Settings

A number of settings are not replicated as part of the Primary/Secondary pairing process and therefore must be manually configured on the Secondary appliance. These are listed by WebUI menu option in the table below:

WebUI Main Menu Option	Sub Menu Option	Description
Local Configuration	Hostname & DNS	Hostname and DNS settings
Local Configuration	Network Interface Configuration	Interface IP addresses, bonding configuration and VLANs
Local Configuration	Routing	Default gateways and static routes
Local Configuration	System Date & time	Time and date related settings
Local Configuration	Physical – Advanced Configuration	Various appliance settings
Local Configuration	Portal Management	Portal management settings
Local Configuration	Security	Security settings
Local Configuration	SNMP Configuration	SNMP settings
Local Configuration	Graphing	Graphing settings
Local Configuration	License Key	Appliance licensing
Maintenance	Backup & Restore	Local XML backups
Maintenance	Software Updates	Appliance software updates
Maintenance	Fallback Page	Fallback page configuration
Maintenance	Firewall Script	Firewall (iptables) configuration
Maintenance	Firewall Lockdown Wizard	Appliance management lockdown settings

(!) Important

Make sure that where any of the above have been configured on the Primary appliance, they're also configured on the Secondary.


15.1.2. Configuring the HA Clustered Pair

8 Note

If you have already run the firewall lockdown wizard on either appliance, you'll need to ensure that it is temporarily disabled on both appliances whilst performing the pairing process.


- 1. Deploy a second appliance that will be the Secondary and configure initial network settings.
- 2. Using the WebUI on the Primary appliance, navigate to: *Cluster Configuration > High-Availability Configuration*.

Create a Clustered Pair

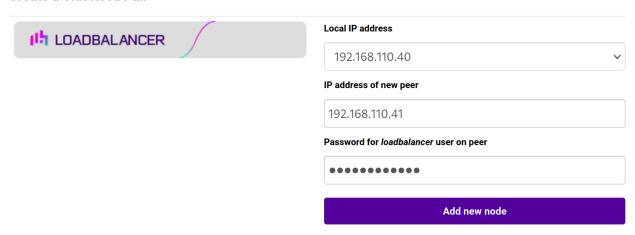

- 3. Specify the IP address and the *loadbalancer* user's password for the Secondary (peer) appliance as shown in the example above.
- 4. Click Add new node.
- 5. The pairing process now commences as shown below:

Create a Clustered Pair

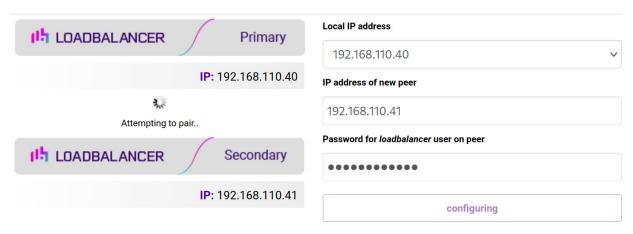


6. Once complete, the following will be displayed on the Primary appliance:

High Availability Configuration - primary



7. To finalize the configuration, restart heartbeat and any other services as prompted in the "Commit changes" message box at the top of the screen.

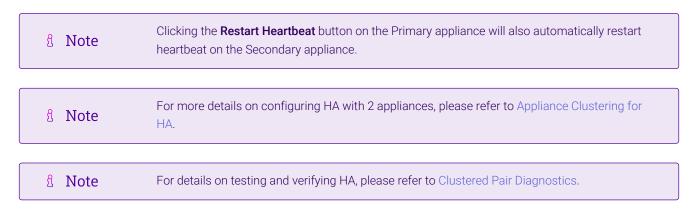

16. Document Revision History

Version	Date	Change	Reason for Change	Changed By
1.3.0	5 November 2019	Styling and layout	General styling updates	АН
1.3.1	28 August 2020	New title page	Branding update	АН
		Updated Canadian contact details Amended instructions for configuring the persistence timeout	Change to Canadian contact details Changes to the appliance WebUI	
1.4.0	1 September 2022	Converted the document to AsciiDoc Updated links and instructions where necessary	Move to new documentation system Required updates	АН
1.4.1	28 September 2022	Updated layer 7 VIP and RIP creation screenshots	Reflect changes in the web user interface	AH
1.4.2	5 January 2023	Added one level of section numbering	Housekeeping across all documentation	АН
1.4.3	2 February 2023	Updated screenshots	Branding update	АН
1.4.4	8 March 2023	Changed the configuration to utilize SSL termination on the load balancer	Oracle recommended method	RJC
1.4.5	14 March 2023	Improved document structure	Document standardization	RJC
1.5.0	24 March 2023	New document theme Modified diagram colours	Branding update	AH
1.6.0	30 April 2024	Restructured document to follow standard format Re-classified as a "Brief"	Required updates	RJC
		Various updates and corrections		



Visit us: www.loadbalancer.org

Phone us: +44 (0)330 380 1064

Phone us: +1 833 274 2566

Email us: info@loadbalancer.org

Follow us: @loadbalancer.org

About Loadbalancer.org

Loadbalancer.org's mission is to ensure that its clients' businesses are never interrupted. The load balancer experts ask the right questions to get to the heart of what matters, bringing a depth of understanding to each deployment. Experience enables Loadbalancer.org engineers to design less complex, unbreakable solutions and to provide exceptional personalized support.

